

Industrial ADSL Router

ADSL-350



Member of


 broadband
 forum
 member company

- ⌘ Industrial remote access using the Internet
 - Economic and environmental benefits
 - Access SCADA systems, HMI and PLCs remotely
 - Supports a wide range of ADSL-standards including long lines
- ⌘ Designed for industrial applications
 - RS-232 port with intelligent modem replacement features
 - Compact DIN-Rail mounted unit, with a wide power input range, 10 to 60 VDC
 - All connectors and LEDs on the front
- ⌘ Secured Internet access made easy
 - Designed to cope with the threats of the Internet environment
 - Easy to use firewall prevents unauthorized access
 - Encrypted and secure data transmission with VPN-tunnels
- ⌘ A wide-variety of solutions to common communication issues
 - Simple replacement of analogue leased lines
 - Ability to connect two different Ethernet-devices directly to the router
 - Serial protocols as well as serial to Ethernet conversion features



R&TTE
 Radio and telecommunications
 terminal equipment

Remote access removes boundaries, eliminates the need for time consuming site visits and provides a network infrastructure suitable for today's "always-on" society. The ADSL-350 is an industrially designed ADSL broadband router built to cope with harsh environments and the characteristics of industrial applications. The unit supports a wide range of ADSL-standards and has support for long lines.

Most devices today comes equipped with an Ethernet port for communications, therefore the ADSL-350 has a built-in two port Ethernet switch. For legacy connectivity the unit also features one RS-232-port to provide multiple connection possibilities for both new and legacy replacement installations. Designed to be installed on a DIN rail all connectors and LEDs have been positioned in the front of the unit, facing the user for easy access and fast status feedback. With the wide power input range the unit can be powered from 10 to 60VDC and has low power consumption.

The cyber security features of the ADSL-350 prevent unauthorized access and secure the communication for Internet-enabled applications. The easy to use firewall filters incoming traffic, allowing only approved packets to pass through. To inter-connect units with each other securely over the Internet multiple VPN technologies are supported, including IPsec and OpenVPN.


Upgrading legacy solutions to become IP-enabled can prove both costly and tedious therefore the ADSL-350 includes a wide feature set for various legacy applications including both modem replacement methods as well as serial to Ethernet conversion. If there are applications that require extra attention Westermo's extensive experience from over 35 years within industrial data communications and over 5 years of industrial ADSL expertise will be available to assist you.

Ordering Information

Art.no	Description
3623-0301	ADSL-350 Industrial ADSL router for ADSL/ADSL2/ADSL2+, 10 to 60VDC
3125-0001	PS-30 Power Supply

Specifications ADSL-350

Dimensional drawing

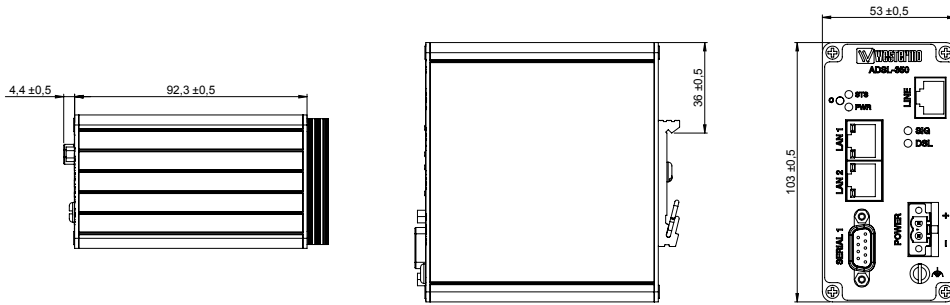

Dimension W x H x D 53 x 103 x 97 mm (2.08 x 4.05 x 3.81 in)
 Weight 0.4 kg
 Degree of protection IP 40

Power

Operating voltage	12 to 48 VDC
Rated voltage	10 to 60 VDC
Rated current	520 mA @ 12 VDC

Interfaces

RS-232	1 x 300 bit/s – 115.2 kbit/s
Ethernet TX	2 x 10 Mbit/s or 100 Mbit/s
DSL	1 x RJ-11, LLC /VC-MUX, PPPoE, PPPoA

Temperature

Operating	-25 to +70°C (-13 to +158°F)
Storage & Transport	-40 to +85°C (-40 to +185°F)

Agency approvals and standards compliance

EMC	EN 55024, EN 55024 A1, EN 55024 A2, Electromagnetic compatibility – Immunity IT equipment.
	IT equipment, EN 55022, EN 55022 A1, Information technology equipment.
	Radio disturbance characteristics. Limits and methods of measurement.
Safety	IEC/EN 60950-1, IT equipment.

Protocols and Functionality

Ethernet Technologies	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseTX Layer-2 QoS IEEE 802.1p Class of Service
ADSL Technologies	ITU-T G.992.1 ADSL (Annex A (non overlap)) ITU-T G.992.2 ADSL Lite (Annex A (non overlap)) ITU-T G.992.3 ADSL2 (Annex A, I, L, M (non overlap)) ITU-T G.992.5 ADSL2+ (Annex A, I, M (non overlap)) RFC2684 Bridged LLC and Bridged VC-MUX ATM encap. (ADSL) ADSL2++ Quad spectrum downstream and double upstream TR-067 Compliance Dying Gasp support ITU K.21 Support Rate adaptive modem at 32 Kbps steps ATM Layer with traffic shaping QoS support (UBR, CBR, VBR-rt, VBR-nrt) AAL5 – AAL F5 OAM Loopback/Send and receive RFC2364 PPPoA client support RFC2516 PPPoE client support RFC2225 / RFC1577 Classical IP Support PAP/CHAP/MS-CHAP for Password Authentication support
Serial Port Technologies	RS-232 Serial Over IP (Serial Extender and Virtual Serial Port) Modem emulation AT command interpreter MODBUS DNP3
IP Routing, Firewall, VPN and Cyber Security	Static IP routing Dynamic IP routing <ul style="list-style-type: none"> • RIPv1/v2 VRRP GRE Stateful inspection Firewall / ACL, NAT, Port Forwarding 25 x IPsec VPN, PSK & X.509 1 x L2TP client 1 x PPTP client 1 x OpenVPN / SSL VPN client RADIUS PPP Dial in/Dial out
Manageability	Management tools <ul style="list-style-type: none"> • Web interface (HTTP and HTTPS) • Command Line Interface (CLI) via SSHv2 and TELNET • SNMPv1/v2c Syslog (log files) SNTP (NTP client) DHCP client DHCP server DDNS (Dynamic DNS update client)