

N9048B PXE EMI Receiver

1 Hz to 44 GHz



Table of Contents

Definition and Terms	3
Frequency and Time Specifications	4
Amplitude Accuracy and Range Specifications	7
Dynamic Range Specifications	14
Powersuite Specifications	26
General Specifications	27
Inputs and Outputs	29
IQ Analyzer	31
Time Domain Scan (TDS)	32
Related Literature	34

Definition and Terms

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical values describe additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The receiver will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy.
- Signal frequencies < 10 MHz, with DC coupling applied
- The receiver has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on
- The receiver has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from "Time and Temperature" to one of the disabled duration choices, the receiver may fail to meet specifications without informing the user


This data sheet is a summary of the specifications and conditions for the PXE EMI receiver. For the complete specifications guide, visit:

www.keysight.com/find/PXE



Keep the test queue flowing

In EMC testing, success depends on tools that can help you do more in less time—today and tomorrow. That's why Keysight Technologies, Inc. created the PXE: it's a standards-compliant EMI receiver and diagnostic signal analyzer built on an upgradeable platform. In the lab and on the bench, it provides the accuracy, repeatability, and reliability you need to test with confidence. Equip your team with the PXE and keep the test queue flowing.

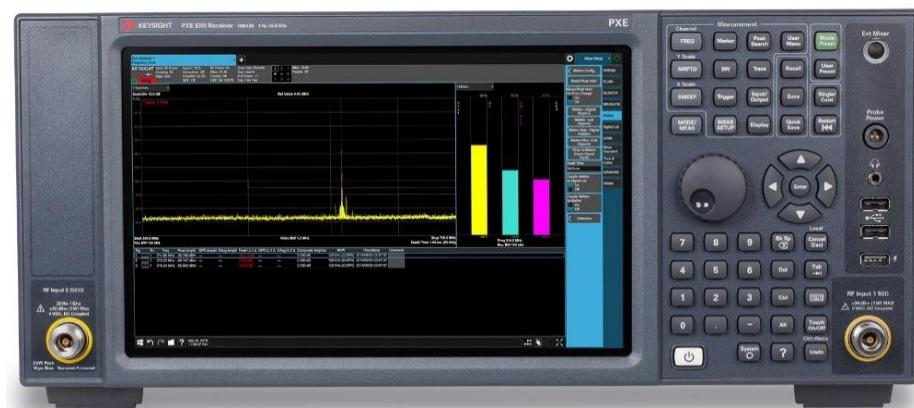

Frequency and Time Specifications

Frequency range	DC coupled	AC coupled
Input 1		
Option 503	1 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508	1 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 526	1 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 544	1 Hz to 44 GHz	10 MHz to 44 GHz
Input 2	1 Hz to 1 GHz	10 MHz to 1 GHz
Band	LO Multiple (N)	
0	1	1 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17.0 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 44 GHz
Frequency reference	Standard	With option PFR $\pm [(time \ since \ last \ adjustment \times aging \ rate) + temperature \ stability + calibration \ accuracy]$
Accuracy		
Aging rate	$\pm 1 \times 10^{-6} / year$	$\pm 1 \times 10^{-7} / year$
Temperature stability		
20 to 30 °C	$\pm 2 \times 10^{-6}$	$\pm 1.5 \times 10^{-8}$
Full temperature range	$\pm 2 \times 10^{-6}$	$\pm 5 \times 10^{-8}$
Achievable initial calibration accuracy	$\pm 1.4 \times 10^{-6}$	$\pm 4 \times 10^{-8}$
Residual FM	$\leq (0.25 \ Hz \times N)_{p-p}$ in 20 ms (nominal). N is the LO multiplication factor	
Frequency readout accuracy (start, stop, center, marker)		
$\pm (marker \ frequency \times frequency \ reference \ accuracy + 0.25 \% \times span + 5 \% \times RBW + 2 \ Hz + 0.5 \times horizontal \ resolution^1)$		
Marker frequency counter		
Accuracy	$\pm (marker \ frequency \times frequency \ reference \ accuracy + 0.100 \ Hz)$	
Delta counter accuracy	$\pm (\delta \ frequency \times frequency \ reference \ accuracy + 0.141 \ Hz)$	
Counter resolution	0.001 Hz	
Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy		
Stepped/Swept	$\pm (0.25 \% \times span + horizontal \ resolution)$	
FFT	$\pm (0.1 \% \times span + horizontal \ resolution)$	

1. Horizontal resolution is span/(sweep points – 1)

Sweep time and triggering

Range	Span = 0 Hz	1 μ s to 6000 s
	Span \geq 10 Hz	1 ms to 4000 s
Accuracy	Span \geq 10 Hz, swept	\pm 0.01 % nominal
	Span \geq 10 Hz, FFT	\pm 40 % nominal
	Span = 0 Hz	\pm 0.01 % nominal
Trigger	Free run, Line, Video, External 1, External 2, RF Burst, Periodic timer	
Trigger delay	Span = 0 or FFT	-150 to +500 ms
	Span \geq 10 Hz, swept	0 to 500 ms
	Resolution	0.1 μ s

Gated Sweep

Gate methods	Gated LO; gated video; gated FFT
Gate length range	1 μ s to 5.0 s (Except method = FFT)
Gate delay range	0 to 100.0 s
Gate delay jitter	33.3 ns p-p, nominal

Sweep/Step (trace) point range

Analyzer mode	1 to 100,001
Receiver mode	1 to 4,000,001

Resolution bandwidth (RBW)

EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz
EMI bandwidths (Mil-STD-461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz
Range (-3 dB bandwidth)	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz
Bandwidth accuracy (power)	
1 Hz to 750 kHz	\pm 1.0 % (\pm 0.044 dB)
820 kHz to 1.2 MHz (< 3.6 GHz CF)	\pm 2.0 % (\pm 0.088 dB)
1.3 to 2 MHz (< 3.6 GHz CF)	\pm 0.07 dB nominal
2.2 to 3 MHz (< 3.6 GHz CF)	\pm 0.15 dB nominal
4 to 8 MHz (< 3.6 GHz CF)	\pm 0.25 dB nominal
Bandwidth accuracy (-3 dB)	1 Hz to 1.3 MHz
Selectivity (-60 dB/-3 dB)	\pm 2% nominal
Selectivity (-60 dB/-3 dB)	4.1: 1 nominal

Video bandwidth (VBW)

Range	1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)
Accuracy	\pm 6 % (nominal)

Analysis bandwidth 1

Maximum bandwidth	Option B40	40 MHz
	Option B25	25 MHz
	Standard	10 MHz

Real time scan bandwidth

Option N9048WT1B	170 MHz
Option N9048WT2B	350 MHz

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain

RF preselector filters	Filter band	Filter type	6 dB Bandwidth (nominal)
150 kHz	Fixed lowpass	289 kHz (-3 dB corner frequency)	
150 kHz to 30 MHz	Fixed bandpass	36 MHz	
30 to 52 MHz	Fixed bandpass	28 MHz	
52 to 75 MHz	Fixed bandpass	39 MHz	
75 to 120 MHz	Fixed bandpass	63 MHz	
120 to 165 MHz	Fixed bandpass	71 MHz	
165 to 210 MHz	Fixed bandpass	69 MHz	
210 to 255 MHz	Fixed bandpass	71 MHz	
255 to 300 MHz	Fixed bandpass	68 MHz	
300 to 475 MHz	Fixed bandpass	284 MHz	
475 to 650 MHz	Fixed bandpass	305 MHz	
650 to 825 MHz	Fixed bandpass	302 MHz	
825 to 1000 MHz	Fixed bandpass	314 MHz	
1 GHz	Fixed highpass	912 MHz (-3 dB corner frequency)	
1.7 GHz	Fixed highpass	1.56 GHz (-3 dB corner frequency)	
2.9 GHz	Fixed highpass	2.29 GHz (-3 dB corner frequency)	
Notch filters			
Reject band	2.4 to 2.5 GHz		
Reject attenuation	20 dB nominal		

Amplitude Accuracy and Range Specifications

Amplitude range					
Measurement range	Displayed average noise level (DANL) to +30 dBm				
Input attenuator range	0 to 70 dB in 2 dB steps				
Maximum safe input level		RF input 1	RF input 2		
Average total power	+30 dBm (1 W)		+30 dBm (1 W)		
Peak pulse power	+50 dBm (100 W)		+50 dBm (100 W)		
Surge power	+2 kW (10 µs pulse width)				
DC volts					
DC coupled	± 0.2 Vdc	± 0.2 Vdc			
AC coupled	± 100 Vdc	± 100 Vdc			
Display range					
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)				
Linear scale	10 divisions				
Scale units	dBm, dBmV, dBµV, dBmA, dBµA, V, W, A, dBuV/m, dBuA/m, dBpT, dBG, dBpW				
Frequency response		Specification	95th percentile		
Maximum error relative to reference condition (50 MHz), Mechanical attenuator only, Non-FFT operation only, 20-30°C					
RF/MW (Option 503/508/526)					
RF preselector Off, Preamp Off (10 dB attenuation)	1 Hz to 9 kHz 9 kHz to 10 MHz 10 MHz to 1.0 GHz 1.0 to 3.6 GHz 3.5 to 17.1 GHz 17.0 to 22.0 GHz 22.0 to 26.5 GHz	± 0.45 dB ± 0.45 dB ± 0.40 dB ± 0.60 dB ± 1.00 dB ± 1.20 dB ± 1.40 dB	± 0.16 dB ± 0.25 dB ± 0.25 dB ± 0.25 dB ± 0.50 dB ± 0.55 dB ± 0.60 dB		
RF preselector On, Preamp off (10 dB attenuation)	1 Hz to 9 kHz 9 kHz to 10 MHz 10 MHz to 1.0 GHz 1.0 to 3.6 GHz 3.5 to 17.1 GHz 17.0 to 22.0 GHz 22.0 to 26.5 GHz	± 0.50 dB ± 0.60 dB ± 0.50 dB ± 0.60 dB ± 1.00 dB ± 1.20 dB ± 1.40 dB	± 0.20 dB ± 0.25 dB ± 0.23 dB ± 0.25 dB ± 0.50 dB ± 0.55 dB ± 0.60 dB		
RF Preselector Off, Preamp On, LNA Off (0 dB attenuation)	100 kHz to 10 MHz 10 MHz to 1.0 GHz 1.0 to 3.6 GHz 3.5 to 17.1 GHz 17.0 to 22.0 GHz 22.0 to 26.5 GHz	± 0.70 dB ± 0.60 dB ± 0.70 dB ± 1.50 dB ± 1.80 dB ± 2.00 dB	± 0.36 dB ± 0.25 dB ± 0.30 dB ± 0.75 dB ± 0.95 dB ± 0.95 dB		
RF Preselector On, Preamp On, LNA Off (0 dB attenuation)	1 to 9 kHz 9 kHz to 10 MHz 10 to 30 MHz 30 MHz to 1.0 GHz 1.0 to 3.6 GHz	± 0.50 dB ± 0.80 dB ± 0.80 dB ± 0.50 dB ± 0.60 dB	± 0.20 dB ± 0.31 dB ± 0.32 dB ± 0.23 dB ± 0.23 dB		

	3.5 to 17.1 GHz	± 1.50 dB	± 0.75 dB
	17.0 to 22.0 GHz	± 1.80 dB	± 0.95 dB
	22.0 to 26.5 GHz	± 2.00 dB	± 0.95 dB
RF Preselector Off, Preamp Off or On, LNA On (0 dB attenuation)	30 MHz to 1.0 GHz	± 0.50 dB	± 0.25 dB
	1.0 to 3.6 GHz	± 0.60 dB	± 0.30 dB
RF Preselector On, Preamp Off or On, LNA On (0 dB attenuation)	10 to 30 MHz		± 0.35 dB
	30 MHz to 1.0 GHz	± 0.50 dB	± 0.22 dB
	1.0 to 3.6 GHz	± 0.60 dB	± 0.27 dB
RF Preselector On or Off, Preamp Off, LNA On (0 dB attenuation)	3.5 to 8.4 GHz	± 1.60 dB	± 0.75 dB
	8.3 to 17.1 GHz	± 1.60 dB	± 0.85 dB
	17.0 to 26.5 GHz	± 1.90 dB	± 0.95 dB
RF Preselector On or Off, Preamp On, LNA On (0 dB attenuation)	3.5 to 13.6 GHz	± 1.60 dB	± 0.75 dB
	13.5 to 17.1 GHz	± 1.60 dB	± 0.85 dB
	17.0 to 22.0 GHz	± 1.80 dB	± 0.95 dB
	22.0 to 26.5 GHz	± 2.00 dB	± 0.95 dB
Millimeter-Wave (Option 544)			
RF preselector Off, Preamp Off (10 dB attenuation)	1 Hz to 9 kHz	± 0.45 dB	± 0.16 dB
	9 kHz to 10 MHz	± 0.45 dB	± 0.25 dB
	10 MHz to 1.0 GHz	± 0.40 dB	± 0.25 dB
	1.0 to 3.6 GHz	± 0.60 dB	± 0.25 dB
	3.5 to 5.2 GHz	± 1.50 dB	± 0.60 dB
	5.2 to 17.1 GHz	± 1.00 dB	± 0.45 dB
	17.0 to 26.5 GHz	± 1.20 dB	± 0.55 dB
	26.4 to 34.5 GHz	± 1.80 dB	± 0.70 dB
	34.4 to 40.0 GHz	± 2.30 dB	± 1.10 dB
	40.0 to 44.0 GHz	± 2.60 dB	± 1.30 dB
RF preselector On, Preamp off (10 dB attenuation)	1 Hz to 9 kHz	± 0.50 dB	± 0.20 dB
	9 kHz to 10 MHz	± 0.60 dB	± 0.25 dB
	10 MHz to 1.0 GHz	± 0.50 dB	± 0.23 dB
	1.0 to 3.6 GHz	± 0.60 dB	± 0.25 dB
	3.5 to 5.2 GHz	± 1.50 dB	± 0.60 dB
	5.2 to 17.1 GHz	± 1.00 dB	± 0.45 dB
	17.0 to 26.5 GHz	± 1.20 dB	± 0.55 dB
	26.4 to 34.5 GHz	± 1.80 dB	± 0.70 dB
	34.4 to 40.0 GHz	± 2.30 dB	± 1.10 dB
	40.0 to 44.0 GHz	± 2.60 dB	± 1.30 dB
RF Preselector Off, Preamp On, LNA Off (0 dB attenuation)	100 kHz to 10 MHz	± 0.70 dB	± 0.36 dB
	10 MHz to 1.0 GHz	± 0.60 dB	± 0.25 dB
	1.0 to 3.6 GHz	± 0.70 dB	± 0.30 dB
	3.5 to 5.2 GHz	± 1.70 dB	± 0.65 dB
	5.2 to 17.1 GHz	± 1.20 dB	± 0.50 dB
	17.0 to 26.5 GHz	± 1.40 dB	± 0.50 dB
	26.4 to 34.5 GHz	± 2.00 dB	± 0.70 dB
	34.4 to 40.0 GHz	± 2.50 dB	± 1.10 dB
	40.0 to 44.0 GHz	± 2.80 dB	± 1.30 dB

RF Preselector On, Preamp On, LNA Off (0 dB attenuation)	1 to 9 kHz 9 kHz to 10 MHz 10 to 30 MHz 30 MHz to 1.0 GHz 1.0 to 3.6 GHz 3.5 to 5.2 GHz 5.2 to 17.1 GHz 17.0 to 26.5 GHz 26.4 to 34.5 GHz 34.4 to 40.0 GHz 40.0 to 44.0 GHz	± 0.50 dB ± 0.80 dB ± 0.80 dB ± 0.50 dB ± 0.60 dB ± 1.70 dB ± 1.20 dB ± 1.40 dB ± 2.00 dB ± 2.50 dB ± 2.80 dB	± 0.20 dB ± 0.31 dB ± 0.32 dB ± 0.23 dB ± 0.23 dB ± 0.65 dB ± 0.50 dB ± 0.50 dB ± 0.70 dB ± 1.10 dB ± 1.30 dB
RF Preselector Off, Preamp Off or On, LNA On (0 dB attenuation)	30 MHz to 1.0 GHz 1.0 to 3.6 GHz	± 0.50 dB ± 0.60 dB	± 0.25 dB ± 0.30 dB
RF Preselector On, Preamp Off or On, LNA On (0 dB attenuation)	10 to 30 MHz 30 MHz to 1.0 GHz 1.0 to 3.6 GHz		± 0.35 dB ± 0.22 dB ± 0.27 dB
RF Preselector On or Off, Preamp Off, LNA On (0 dB attenuation)	3.5 to 5.2 GHz 5.2 to 17.1 GHz 17.0 to 26.5 GHz 26.4 to 34.5 GHz 34.4 to 40.0 GHz 40.0 to 44.0 GHz	± 1.70 dB ± 1.30 dB ± 1.50 dB ± 2.00 dB ± 2.50 dB ± 2.90 dB	± 0.65 dB ± 0.50 dB ± 0.55 dB ± 0.70 dB ± 1.10 dB ± 1.30 dB
RF Preselector On or Off, Preamp On, LNA On (0 dB attenuation)	3.5 to 5.2 GHz 5.2 to 17.1 GHz 17.0 to 26.5 GHz 26.4 to 34.5 GHz 34.4 to 40.0 GHz 40.0 to 44.0 GHz	± 1.70 dB ± 1.30 dB ± 1.50 dB ± 2.00 dB ± 2.60 dB ± 3.00 dB	± 0.65 dB ± 0.50 dB ± 0.55 dB ± 0.70 dB ± 1.20 dB ± 1.30 dB

Input attenuation switching uncertainty		Specification	95th percentile
Attenuation > 2 dB, preamp off	50 MHz (reference frequency)	± 0.20 dB	± 0.08 dB typical
Relative to 10 dB			
Absolute amplitude accuracy		Specification	95th percentile
10 dB attenuation, 20 to 30°C, 1 Hz ≤ RBW ≤ 1 MHz, input signal -10 to -50 dBm, RF Preselector Off, Preampl Off and On, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)			
RF input 1	At 50 MHz	± 0.30 dB	± 0.17 dB
	At all frequencies	± (0.30 dB + frequency response)	
RF input 2	At 50 MHz	± 0.35 dB	± 0.21 dB
	At all frequencies	± (0.35 dB + frequency response)	
Input voltage standing wave ratio (VSWR)¹		Input atten = 0 dB	Input atten ≥ 10 dB
RF Preselector Off, Preampl Off			
DC coupled	1 to 18 GHz	3.0:1	2.0:1, 1.8:1 typical
	18 to 26.5 GHz	3.0:1	2.0:1, 1.8:1 typical
	26.5 to 40.0 GHz	3.0:1	2.5:1, 1.8:1 typical
	40.0 to 44.0 GHz		2.0:1 typical
	1 to 18 GHz	3.0:1	2.0:1, 1.8:1 typical
AC coupled	18 to 26.5 GHz	3.0:1	2.4:1, 2.0:1 typical
RF Preselector On, Preampl Off			
DC coupled	9 kHz to 1 GHz	2.0:1	1.2:1, 1.1:1 typical
	1 to 3.6 GHz	3.0:1	2.0:1, 1.5:1 typical
	3.6 to 26.5 GHz	3.0:1	2.0:1, 1.8:1 typical
	26.5 to 40.0 GHz	3.0:1	2.5:1, 1.8:1 typical
	40.0 to 44.0 GHz		2.0:1 typical
AC coupled	55 MHz to 1 GHz	2.0:1	1.2:1
	1 to 18 GHz	3.0:1	2.0:1, 1.8:1 typical
	18 to 26.5 GHz	3.0:1	2.4:1, 2.0:1 typical
RF Preselector Off, Preampl On or Off, LNA On or Off			
DC coupled	1 to 18 GHz	3.0:1	2.0:1, 1.8:1 typical
	18 to 26.5 GHz	3.0:1	2.0:1, 1.8:1 typical
	26.5 to 40.0 GHz	3.0:1	2.5:1, 1.8:1 typical
	40.0 to 44.0 GHz		2.0:1 typical
	1 to 18 GHz	3.0:1	2.0:1, 1.8:1 typical
AC coupled	18 to 26.5 GHz	3.0:1	2.4:1, 2.0:1 typical
RF Preselector On, Preampl On or Off, LNA On or Off			
DC coupled	50 MHz to 1 GHz	2.0:1	1.2:1, 1.1:1 typical
	1 to 3.6 GHz	3.0:1	2.0:1, 1.5:1 typical
	3.6 to 26.5 GHz	3.0:1	2.0:1, 1.8:1 typical
	26.5 to 40.0 GHz	3.0:1	2.5:1, 1.8:1 typical
	40.0 to 44.0 GHz		2.0:1 typical
AC coupled	55 MHz to 1 GHz	2.0:1	1.2:1
	1 to 18 GHz	3.0:1	2.0:1, 1.8:1 typical
	18 to 26.5 GHz	3.0:1	2.4:1, 2.0:1 typical

1. When the notch filter is selected, the specs between 2.3 – 2.6 GHz is not applicable

RBW switching uncertainty (reference to 30 kHz RBW)

1 Hz to 1.5 MHz RBW	± 0.05 dB
1.6 to 3 MHz RBW	± 0.10 dB
4, 5, 6, 8 MHz RBW	± 1.0 dB

Reference level

Range	
Log scale	-170 to +30 dBm in 0.01 dB steps
Linear scale	Same as log (707 pV to 7.07 V)
Accuracy	0 dB

Display scale switching uncertainty

Switching between linear and log	0 dB
Log scale/div switching	0 dB

Display scale fidelity

Between -10 dBm and -80 dBm input mixer level	± 0.10 dB
---	-----------

Total measurement uncertainty	Spectrum analyzer mode (95th percentile)	EMI receiver mode
-------------------------------	--	-------------------

Signal level 0 to 90 dB below reference point, RF attenuation 0 to 40 dB, RBW ≤ 1 MHz, 20° to 30° C

RF/MW (Option 503/508/526)

RF Preselector Off, Preamp Off	9 kHz to 10 MHz 10 MHz to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz	± 0.35 dB ± 0.25 dB ± 0.50 dB ± 0.80 dB	± 0.40 dB ± 0.30 dB ± 0.65 dB ± 0.95 dB
RF Preselector On, Preamp Off	9 kHz to 10 MHz 10 MHz to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz	± 0.31 dB ± 0.20 dB ± 0.50 dB ± 0.80 dB	± 0.44 dB ± 0.31 dB ± 0.65 dB ± 0.95 dB
RF Preselector Off, Preamp On, LNA Off	100 kHz to 10 MHz 10 MHz to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz	± 0.40 dB ± 0.30 dB ± 0.65 dB ± 0.90 dB	± 0.45 dB ± 0.35 dB ± 0.70 dB ± 1.10 dB
RF Preselector On, Preamp On, LNA Off	9 kHz to 10 MHz 10 MHz to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz	± 0.36 dB ± 0.20 dB ± 0.65 dB ± 0.90 dB	± 0.41 dB ± 0.34 dB ± 0.70 dB ± 1.10 dB
RF Preselector Off, Preamp On or Off, LNA On	2 to 10 MHz 10 MHz to 3.6 GHz	± 0.45 dB ± 0.30 dB	± 0.50 dB ± 0.30 dB
RF Preselector On, Preamp On or Off, LNA On	10 MHz to 3.6 GHz	± 0.27 dB	± 0.33 dB
RF Preselector Off or On, Preamp Off, LNA On	3.6 to 18.0 GHz 18.0 to 26.5 GHz	± 0.65 dB ± 0.90 dB	± 0.65 dB ± 1.15 dB
RF Preselector Off or On, Preamp On, LNA On	3.6 to 18.0 GHz 18.0 to 26.5 GHz	± 0.65 dB ± 0.90 dB	± 0.70 dB ± 1.20 dB

Millimeter-Wave (Option 544)

RF Preselector Off, Preamp Off	9 kHz to 10 MHz 10 MHz to 1 GHz 1 to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz 26.5 to 44.0 GHz	± 0.35 dB ± 0.25 dB ± 0.35 dB ± 0.50 dB ± 0.80 dB ± 1.20 dB	± 0.40 dB ± 0.30 dB ± 0.40 dB ± 0.65 dB ± 0.95 dB ± 1.50 dB
RF Preselector On, Preamp Off	9 kHz to 10 MHz 10 MHz to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz 26.5 to 44.0 GHz	± 0.31 dB ± 0.20 dB ± 0.50 dB ± 0.80 dB ± 1.20 dB	± 0.44 dB ± 0.31 dB ± 0.65 dB ± 0.95 dB ± 1.50 dB
RF Preselector Off, Preamp On, LNA Off	100 kHz to 10 MHz 10 MHz to 1.0 GHz 1.0 to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz 26.5 to 44.0 GHz	± 0.40 dB ± 0.30 dB ± 0.35 dB ± 0.65 dB ± 0.90 dB ± 1.25 dB	± 0.45 dB ± 0.35 dB ± 0.40 dB ± 0.70 dB ± 1.10 dB ± 1.55 dB
RF Preselector On, Preamp On, LNA Off	9 kHz to 10 MHz 10 MHz to 3.6 GHz 3.6 to 18.0 GHz 18.0 to 26.5 GHz 26.5 to 44.0 GHz	± 0.36 dB ± 0.25 dB ± 0.65 dB ± 0.90 dB ± 1.25 dB	± 0.41 dB ± 0.34 dB ± 0.70 dB ± 1.10 dB ± 1.55 dB
RF Preselector Off, Preamp On or Off, LNA On	2 to 10 MHz 10 MHz to 1 GHz 1 to 3.6 GHz	± 0.45 dB ± 0.30 dB ± 0.35 dB	± 0.50 dB ± 0.30 dB ± 0.35 dB
RF Preselector On, Preamp On or Off, LNA On	10 MHz to 3.6 GHz	± 0.27 dB	± 0.33 dB
RF Preselector Off or On, Preamp Off, LNA On	3.6 to 18.0 GHz 18.0 to 26.5 GHz 26.5 to 44.0 GHz	± 0.65 dB ± 0.90 dB ± 1.25 dB	± 0.70 dB ± 1.15 dB ± 1.55 dB
RF Preselector Off or On, Preamp On, LNA On	3.6 to 18.0 GHz 18.0 to 26.5 GHz 26.5 to 44.0 GHz	± 0.65 dB ± 0.90 dB ± 1.25 dB	± 0.70 dB ± 1.20 dB ± 1.55 dB

Trace detectors

Normal, peak, sample, negative peak, log power average, RMS average, and voltage average

CISPR detectors: quasi-peak, EMI-avg, RMS-avg

Preamplifier Gain

RF Preselector Off,	100 kHz to 3.6 GHz	+20 dB (nominal)
Preamp On, LNA Off	3.6 to 44 GHz	+28 dB (nominal)
RF Preselector On,	1 to 150 kHz	+20 dB (nominal)
Preamp On, LNA Off	150 kHz to 3.6 GHz	+15 dB (nominal)
RF Preselector On or Off,	150 kHz to 26.5 GHz	+20 dB (nominal)
Preamp Off, LNA On	26.5 to 44 GHz	+16 dB (nominal)
RF Preselector On or Off,	150 kHz to 3.6 GHz	+20 dB (nominal)
Preamp On, LNA On	3.6 to 26.5 GHz	+35 dB (nominal)
	26.5 to 44 GHz	+36 dB (nominal)

Amplitude probability distribution

Specifications

Dynamic range	> 70 dB
Amplitude accuracy	< ± 2.7 dB
Maximum measurable time period	2 minutes
Minimum measurable probability	10^{-7}
Amplitude level assignment	1000 levels
Sampling rate (within a 1 MHz RBW)	≥ 10 MSa/s
Amplitude resolution	0.1881 dB

Dynamic Range Specifications

1 dB gain compression (two-tone)

At 1 kHz RBW with 100 kHz tone spacing, Input 1, 20 to 30 °C

RF Input 1 to 44 GHz (RF Input 2 to 1 GHz, performance = RF Input 1 performance + 9 dB)

RF Preselector Off or On, Preamp Off, LNA Off	9 kHz to 40 MHz 40 MHz to 3.6 GHz 1 to 3.6 GHz 3.5 to 16 GHz 16 to 26.5 GHz 26.4 to 34.5 GHz 34.4 to 44 GHz	+2 dBm nominal +5 dBm nominal +5 dBm nominal +7 dBm nominal +6 dBm nominal +4 dBm nominal +0 dBm nominal
RF Preselector Off, Preamp On, LNA Off	10 MHz to 3.6 GHz 3.5 to 26.5 GHz Tone spacing 100 kHz to 20 MHz Tone spacing > 70 MHz 26.4 to 44 GHz	-13 dBm nominal -23 dBm nominal -16 dBm nominal -30 dBm nominal
RF Preselector On, Preamp On, LNA Off	9 to 150 kHz 150 kHz to 10 MHz 10 to 50 MHz 50 MHz to 3.6 GHz 3.5 to 26.5 GHz Tone spacing 100 kHz to 20 MHz Tone spacing > 70 MHz 26.4 to 44 GHz	-17 dBm nominal -11 dBm nominal -13 dBm nominal -10 dBm nominal -23 dBm nominal -16 dBm nominal -30 dBm nominal
RF Preselector Off or On, Preamp Off, LNA On	30 MHz to 3.6 GHz 3.5 to 26.5 GHz Tone spacing 100 kHz to 20 MHz Tone spacing > 70 MHz 26.4 to 44 GHz	-16 dBm nominal -13 dBm nominal -7 dBm nominal -18 dBm nominal
RF Preselector Off or On, Preamp On, LNA On	30 MHz to 3.6 GHz 3.5 to 26.5 GHz Tone spacing 100 kHz to 20 MHz Tone spacing > 70 MHz 26.4 to 44 GHz	-16 dBm nominal -30 dBm nominal -26 dBm nominal -35 dBm nominal

Spurious response

RF Input 1; RF Preselector Off or On

Residual responses ¹	200 kHz to 8.4 GHz (swept) Zero span or FFT or other frequencies	-100 dBm -100 dBm nominal
Images response		
RF/MW (Option 503/508/526)	10 MHz to 3.6 GHz	-80 dBc, -108 dBc typical
$f \pm 645$ MHz,	3.5 to 13.6 GHz	-81 dBc, -85 dBc typical
Mixer level -10 dBm	13.5 to 17.1 GHz	-81 dBc, -86 dBc typical
	17.0 to 22 GHz	-76 dBc, -81 dBc typical
	22 to 26.5 GHz	-69 dBc, -76 dBc typical
Millimeter-Wave (Option 544)	10 MHz to 3.6 GHz	-80 dBc, -108 dBc typical
$f \pm 645$ MHz,	3.5 to 13.6 GHz	-80 dBc, -102 dBc typical
Mixer level -10 dBm	13.5 to 17.1 GHz	-80 dBc, -102 dBc typical
	17.0 to 22 GHz	-80 dBc, -100 dBc typical
	22 to 26.5 GHz	-70 dBc, -97 dBc typical
Mixer level -30 dBm	26.5 to 34.5 GHz	-70 dBc, -94 dBc typical
	34.4 to 44 GHz	-59 dBc, -79 dBc typical
LO related spurious ($f > 600$ MHz from carrier)	10 MHz to 3.6 GHz	-90 dBc + 20LogN ² typical
Other spurious ($f \geq 10$ MHz from carrier)	Carrier frequency ≤ 26.5 GHz	-80 dBc + 20LogN ² typical
	Carrier frequency > 26.5 GHz	-90 dBc nominal

1. Input terminated, 0 dB input attenuation

2. N is the LO multiplication factor

Second harmonic distortion (SHI)

RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +9 dB; see Specifications Guide for verification conditions

RF/MW (Option 503/508/526)

RF Preselector Off, Preamp Off	10 to 500 MHz 500 MHz to 1.8 GHz 1.8 to 4 GHz 4 to 11 GHz 11 to 13.25 GHz	+54 dBm, +61 dBm typical +45 dBm, +54 dBm typical +60 dBm, +67 dBm typical +65 dBm, +74 dBm typical +65 dBm, +73 dBm typical
RF Preselector On, Preamp Off	10 to 30 MHz 30 to 500 MHz 500 MHz to 1 GHz 1 to 1.6 GHz 1.6 to 1.8 GHz 1.8 to 4 GHz 4 to 11 GHz 11 to 13.25 GHz	+45 dBm, +50 dBm typical +54 dBm, +58 dBm typical +70 dBm, +78 dBm typical +62 dBm, +70 dBm typical +70 dBm, +82 dBm typical +60 dBm, +67 dBm typical +65 dBm, +74 dBm typical +65 dBm, +73 dBm typical

Millimeter-Wave (Option 544)

RF Preselector Off, Preamp Off	10 to 500 MHz 500 MHz to 1.8 GHz 1.8 to 4 GHz 4 to 11 GHz 11 to 13.25 GHz 13.2 to 17.25 GHz 17.2 GHz to 22 GHz	+53 dBm, +61 dBm typical +44 dBm, +54 dBm typical +58 dBm, +67 dBm typical +62 dBm, +69 dBm typical +65 dBm, +73 dBm typical +63 dBm, +71 dBm typical +54 dBm, +67 dBm typical
RF Preselector On, Preamp Off	10 to 30 MHz 30 to 500 MHz 500 MHz to 1 GHz 1 to 1.6 GHz 1.6 to 1.8 GHz 1.8 to 4 GHz 4 to 11 GHz 11 to 13.25 GHz 13.2 to 17.25 GHz 17.2 GHz to 22 GHz	+45 dBm, +50 dBm typical +54 dBm, +58 dBm typical +70 dBm, +78 dBm typical +62 dBm, +70 dBm typical +70 dBm, +82 dBm typical +58 dBm, +67 dBm typical +62 dBm, +69 dBm typical +65 dBm, +73 dBm typical +63 dBm, +71 dBm typical +54 dBm, +67 dBm typical

RF/MW/Millimeter-Wave (Option 503/508/526/544)

RF Preselector Off, Preamp On, LNA Off	10 MHz to 1.8 GHz 1.8 to 2.5 GHz 2.5 to 4.0 GHz 4 to 4.5 GHz 4.5 to 13.25 GHz 13.2 to 22 GHz	+33 dBm nominal +20 dBm nominal +0 dBm nominal +5 dBm nominal +10 dBm nominal +5 dBm nominal
RF Preselector On, Preamp On, LNA Off	10 to 30 MHz 30 to 500 MHz 500 MHz to 1 GHz 1 to 1.6 GHz	+43 dBm nominal +56 dBm nominal +61 dBm nominal +57 dBm nominal

	1.6 to 1.8 GHz	+57 dBm nominal
	1.8 to 2.5 GHz	+20 dBm nominal
	2.5 to 4.0 GHz	+0 dBm nominal
	4.0 to 4.5 GHz	+5 dBm nominal
	4.5 to 13.25 GHz	+10 dBm nominal
	13.2 to 22 GHz	+5 dBm nominal
RF Preselector Off, Preamp Off or On, LNA On	30 MHz to 1.8 GHz	+15 dBm nominal
RF Preselector On, Preamp Off or On, LNA On	30 MHz to 1 GHz	+17 dBm nominal
RF Preselector Off or On, Preamp Off, LNA On	1 to 1.8 GHz	+15 dBm nominal
RF Preselector Off or On, Preamp On, LNA On	1.8 to 13.25 GHz	+15 dBm nominal
	13.2 to 22 GHz	+12 dBm nominal
	1.8 to 4.0 GHz	-7 dBm nominal
	4.0 to 13.25 GHz	-5 dBm nominal
	13.2 to 22 GHz	-7 dBm nominal

Third-order intermodulation distortion (TOI)

RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance + 9 dB;

Tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for verification conditions

RF/MW (Option 503/508/526)

RF Preselector Off, Preamp Off	10 to 100 MHz 100 to 400 MHz 400 MHz to 3.6 GHz 3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 26.5 GHz	+12 dBm, +17 dBm typical +15 dBm, +18 dBm typical +17 dBm, +20 dBm typical +15 dBm, +20 dBm typical +16 dBm, +20 dBm typical +12 dBm, +16 dBm typical
RF Preselector On, Preamp Off	10 to 30 MHz 30 to 100 MHz 100 to 1GHz 1 to 1.5 GHz 1.5 to 3.6 GHz 3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 26.5 GHz	+16.5 dBm, +18 dBm typical +13.5 dBm, +15.5 dBm typical +15 dBm, +17 dBm typical +16 dBm, +17.5 dBm typical +17 dBm, +19.5 dBm typical +15 dBm, +20 dBm typical +16 dBm, +20 dBm typical +12 dBm, +16 dBm typical
RF Preselector Off, Preamp On, LNA Off	10 to 500 MHz 500 MHz to 3.6 GHz 3.5 to 26.5 GHz	+1 dBm nominal +3 dBm nominal -10 dBm nominal
RF Preselector On Preamp On, LNA Off	10 to 30 MHz 30 MHz to 1 GHz 1 to 2 GHz 2 to 3.6 GHz 3.5 to 26.5 GHz	+1 dBm, +3 dBm typical -3 dBm, -1 dBm typical -1 dBm, +1 dBm typical -1 dBm, +2 dBm typical -10 dBm nominal
RF Preselector Off, Preamp Off or On, LNA On	30 to 500 MHz 500 MHz to 3.6 GHz	0 dBm nominal +1 dBm nominal
RF Preselector On, Preamp Off or On, LNA On	30 MHz to 1 GHz 1 to 2 GHz 2 to 3.6 GHz	-8 dBm, -6 dBm typical -6 dBm, -4 dBm typical -4 dBm, -2 dBm typical

RF Preselector Off or On, Preamp Off,	3.5 to 13.6 GHz	+5 dBm nominal
LNA On	13.5 to 26.5 GHz	+1 dBm nominal
RF Preselector Off or On, Preamp On,	3.5 to 13.6 GHz	-14 dBm nominal
LNA On	13.5 to 26.5 GHz	-20 dBm nominal
Millimeter-Wave (Option 544)		
RF Preselector Off, Preamp Off	10 to 100 MHz	+12 dBm, +17 dBm typical
	100 to 400 MHz	+12 dBm, +18 dBm typical
	400 MHz to 3.6 GHz	+17 dBm, +20 dBm typical
	3.5 to 8.4 GHz	+15 dBm, +20 dBm typical
	8.3 to 13.6 GHz	+16 dBm, +20 dBm typical
	13.5 to 26.5 GHz	+9 dBm, +13 dBm typical
	26.4 GHz to 34.5 GHz	+11 dBm, +15.5 dBm typical
	34.4 GHz to 44 GHz	+6 dBm, +10 dBm typical
RF Preselector On, Preamp Off	10 to 30 MHz	+16.5 dBm, +18 dBm typical
	30 to 100 MHz	+12.5 dBm, +14.5 dBm typical
	100 MHz to 1 GHz	+14.5 dBm, +16.5 dBm typical
	1 to 1.5 GHz	+16 dBm, +17.5 dBm typical
	1.5 to 3.6 GHz	+17 dBm, +19.5 dBm typical
	3.5 to 8.4 GHz	+15 dBm, +20 dBm typical
	8.3 to 13.6 GHz	+16 dBm, +20 dBm typical
	13.5 to 26.5 GHz	+9 dBm, +13 dBm typical
	26.4 GHz to 34.5 GHz	+11 dBm, +15.5 dBm typical
	34.4 GHz to 44 GHz	+6 dBm, +10 dBm typical
RF Preselector Off, Preamp On, LNA Off	10 to 500 MHz	+1 dBm nominal
	500 MHz to 3.6 GHz	+3 dBm nominal
	3.5 to 13.6 GHz	-10 dBm nominal
	13.5 to 34.5 GHz	-15 dBm nominal
	34.4 GHz to 44 GHz	-20 dBm nominal
RF Preselector On, Preamp On, LNA Off	10 to 30 MHz	+1 dBm, +3 dBm typical
	30 MHz to 1 GHz	-5 dBm, -1 dBm typical
	1 to 2 GHz	-1 dBm, +1 dBm typical
	2 to 3.6 GHz	-1 dBm, +2 dBm typical
	3.5 to 13.6 GHz	-10 dBm nominal
	13.5 to 34.5 GHz	-15 dBm nominal
	34.4 GHz to 44 GHz	-20 dBm nominal
RF Preselector Off, Preamp Off or On, LNA On	30 to 500 MHz	+0 dBm nominal
	500 MHz to 3.6 GHz	+1 dBm nominal
RF Preselector On, Preamp Off or On, LNA On	30 MHz to 1 GHz	-8 dBm, -6 dBm typical
	1 to 2 GHz	-6 dBm, -4 dBm typical
	2 to 3.6 GHz	-4 dBm, -2 dBm typical
RF Preselector Off or On, Preamp Off, LNA On	3.5 to 13.6 GHz	+0 dBm nominal
	13.5 to 26.5 GHz	-3 dBm nominal
	26.4 GHz to 34.5 GHz	+2 dBm nominal
	34.4 GHz to 44 GHz	-3 dBm nominal

RF Preselector Off or On, Preamp On, LNA On	3.5 to 13.6 GHz 13.5 to 26.5 GHz 26.4 GHz to 34.5 GHz 34.4 GHz to 44 GHz	-18 dBm nominal -20 dBm nominal -18 dBm nominal -27 dBm nominal
Displayed average noise level (DANL)	Specification	Typical including NFE
Input terminated, 1 Hz RBW, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30°C. Input 1; Input 2 = Input 1 performance + 11 dB; NFE = Noise Floor Extension		
RF/MW (Option 503/508/526)		
RF Preselector Off, Preamp Off	1 Hz 2 Hz to 10 Hz 20 Hz 100 Hz 1 kHz 9 to 150 kHz 150 kHz to 1 MHz 1 to 10 MHz 10 MHz to 1 GHz 1 to 2.5 GHz 2.5 to 3.6 GHz 3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 18 GHz 18 to 25 GHz 25 to 26.5 GHz	-70 dBm, nominal ¹ -110 dBm, nominal ¹ -120 dBm -125 dBm -130 dBm -142 dBm -153 dBm -154 dBm -154 dBm -164 dBm -151 dBm -161 dBm -148 dBm -158 dBm -153 dBm -163 dBm -152 dBm -162 dBm -150 dBm -160 dBm -146 dBm -155 dBm -143 dBm -155 dBm
RF Preselector On, Preamp Off	1 Hz 2 Hz to 10 Hz 20 Hz 100 Hz 1 kHz 9 to 100 kHz 100 to 150 kHz 150 to 500 kHz 500 kHz to 30 MHz 30 MHz to 1 GHz 1 to 1.7 GHz 1.7 to 2.5 GHz 2.5 to 3.6 GHz 3.5 to 8.4 GHz 8.3 to 13.6 GHz 13.5 to 18 GHz 18 to 25 GHz 25 to 26.5 GHz	-70 dBm, nominal ¹ -110 dBm, nominal ¹ -120 dBm -125 dBm -130 dBm -141 dBm -143 dBm -142 dBm -163 dBm -149 dBm -161 dBm -153 dBm -163 dBm -154 dBm -165 dBm -156 dBm -166 dBm -153 dBm -163 dBm -151 dBm -161 dBm -153 dBm -163 dBm -152 dBm -162 dBm -150 dBm -160 dBm -146 dBm -155 dBm -143 dBm -155 dBm

1. No NFE factor at this frequency.

RF Preselector Off, Preamp On, LNA Off	100 kHz to 1 MHz	-157 dBm	
	1 to 10 MHz	-165 dBm	
	10 MHz to 1 GHz	-165 dBm	-174 dBm
	1 to 3.6 GHz	-161 dBm	-172 dBm
	3.5 to 13.6 GHz	-164 dBm	-174 dBm
	13.5 to 26.5 GHz	-160 dBm	-170 dBm
RF Preselector On, Preamp On, LNA Off	1 kHz	-145 dBm	-150 dBm
	9 to 100 kHz	-160 dBm	-161 dBm
	100 to 1 MHz	-160 dBm	-171 dBm
	1 to 30 MHz	-163 dBm	-173 dBm
	30 MHz to 1 GHz	-164 dBm	-174 dBm
	1 to 1.7 GHz	-165 dBm	-174 dBm
	1.7 to 2.5 GHz	-164 dBm	-174 dBm
	2.5 to 3.6 GHz	-161 dBm	-172 dBm
	3.5 to 13.6 GHz	-164 dBm	-174 dBm
	13.5 to 26.5 GHz	-160 dBm	-170 dBm
RF Preselector Off, Preamp Off or On, LNA On	150 kHz to 1 MHz		-92 dBm
	1 to 10 MHz		-119 dBm
	10 to 30 MHz		-148 dBm
	30 to 50 MHz	-161 dBm	-172 dBm
	50 to 150 MHz	-165 dBm	-172 dBm
	150 MHz to 2 GHz	-167 dBm	-172 dBm
	2 to 3.6 GHz	-164 dBm	-172 dBm
RF Preselector On, Preamp Off or On, LNA On	150 kHz to 1 MHz		-100 dBm
	1 to 10 MHz		-125 dBm
	10 to 30 MHz		-165 dBm
	30 to 50 MHz	-163 dBm	-174 dBm
	50 to 100 MHz	-165 dBm	-174 dBm
	100 to 150 MHz	-166 dBm	-174 dBm
	150 MHz to 2 GHz	-166 dBm	-174 dBm
	2 to 3.6 GHz	-165 dBm	-174 dBm
	3.5 to 8.4 GHz	-165 dBm	-172 dBm
	8.3 to 13.6 GHz	-164 dBm	-171 dBm
RF Preselector Off/On, Preamp Off, LNA On	13.5 to 19 GHz	-163 dBm	-170 dBm
	19 to 22GHz	-161 dBm	-170 dBm
	22 to 26.5 GHz	-157 dBm	-168 dBm
	3.5 to 8 GHz	-167 dBm	-174 dBm
	8 to 13.6 GHz	-166 dBm	-174 dBm
RF Preselector Off/On, Preamp On, LNA On	13.5 to 19 GHz	-165 dBm	-173 dBm
	19 to 22GHz	-164 dBm	-173 dBm
	22 to 26.5 GHz	-163 dBm	-172 dBm

Millimeter-Wave (Option 544)

RF Preselector Off, Preamp Off	1 Hz	-70 dBm, nominal ¹
	2 Hz to 10 Hz	-105 dBm, nominal ¹
	20 Hz	-115 dBm
	100 Hz	-125 dBm
	1 kHz	-130 dBm
	9 to 150 kHz	-142 dBm
	150 kHz to 1 MHz	-153 dBm
	1 to 10 MHz	-154 dBm
	10 MHz to 1 GHz	-154 dBm -164 dBm
	1 to 2.5 GHz	-151 dBm -161 dBm
	2.5 to 3.6 GHz	-148 dBm -158 dBm
	3.5 to 8.4 GHz	-149 dBm -161 dBm
	8.3 to 13.6 GHz	-150 dBm -162 dBm
	13.5 to 18 GHz	-147 dBm -158 dBm
	18 to 25 GHz	-144 dBm -155 dBm
	25 to 26.5 GHz	-142 dBm -154 dBm
	26.4 to 34.5 GHz	-142 dBm -156 dBm
	34.4 to 40 GHz	-137 dBm -151 dBm
	40 to 42 GHz	-135 dBm -150 dBm
	42 to 44 GHz	-133 dBm -147 dBm
RF Preselector On, Preamp Off	1 Hz	-70 dBm, nominal ¹
	2 Hz to 10 Hz	-105 dBm, nominal ¹
	20 Hz	-115 dBm
	100 Hz	-125 dBm
	1 kHz	-130 dBm
	9 to 100 kHz	-141 dBm -143 dBm
	100 to 150 kHz	-142 dBm -163 dBm
	150 to 500 kHz	-149 dBm -161 dBm
	500 kHz to 30 MHz	-153 dBm -163 dBm
	30 MHz to 1 GHz	-154 dBm -165 dBm
	1 to 1.7 GHz	-156 dBm -166 dBm
	1.7 to 2.5 GHz	-153 dBm -163 dBm
	2.5 to 3.6 GHz	-151 dBm -161 dBm
	3.5 to 8.4 GHz	-149 dBm -161 dBm
	8.3 to 13.6 GHz	-150 dBm -162 dBm
	13.5 to 18 GHz	-147 dBm -158 dBm
	18 to 25 GHz	-144 dBm -155 dBm
	25 to 26.5 GHz	-142 dBm -154 dBm
	26.4 to 34.5 GHz	-142 dBm -156 dBm
	34.4 to 40 GHz	-137 dBm -151 dBm
	40 to 42 GHz	-135 dBm -150 dBm
	42 to 44 GHz	-133 dBm -147 dBm

1. No NFE factor at this frequency.

RF Preselector Off	100 kHz to 1 MHz	-157 dBm	
Preamp On, LNA Off	1 to 10 MHz	-165 dBm	
	10 MHz to 1 GHz	-165 dBm	-174 dBm
	1 to 3.6 GHz	-161 dBm	-172 dBm
	3.5 to 8.4 GHz	-162 dBm	-174 dBm
	8.3 to 13.6 GHz	-164 dBm	-174 dBm
	13.5 to 26.5 GHz	-160 dBm	-170 dBm
	26.4 to 34.5 GHz	-158 dBm	-169 dBm
	34.4 to 42 GHz	-155 dBm	-165 dBm
	42 to 43 GHz	-151 dBm	-162 dBm
	43 to 44 GHz	-149 dBm	
RF Preselector On,	1 kHz	-145 dBm	-150 dBm
Preamp On, LNA Off	9 to 100 kHz	-160 dBm	-161 dBm
	100 to 1 MHz	-160 dBm	-171 dBm
	1 to 30 MHz	-163 dBm	-173 dBm
	30 MHz to 1 GHz	-164 dBm	-174 dBm
	1 to 1.7 GHz	-165 dBm	-174 dBm
	1.7 to 2.5 GHz	-164 dBm	-174 dBm
	2.5 to 3.6 GHz	-161 dBm	-172 dBm
	3.5 to 8.4 GHz	-162 dBm	-174 dBm
	8.3 to 13.6 GHz	-164 dBm	-174 dBm
	13.5 to 26.5 GHz	-160 dBm	-170 dBm
	26.4 to 34.5 GHz	-158 dBm	-169 dBm
	34.4 to 42 GHz	-155 dBm	-165 dBm
	42 to 43 GHz	-151 dBm	-162 dBm
	43 to 44 GHz	-149 dBm	
RF Preselector Off,	150 kHz to 1 MHz		-92 dBm
Preamp Off or On, LNA	1 to 10 MHz		-119 dBm
On	10 to 30 MHz		-148 dBm
	30 to 50 MHz	-161 dBm	-172 dBm
	50 to 150 MHz	-165 dBm	-172 dBm
	150 MHz to 2 GHz	-167 dBm	-172 dBm
	2 to 3.6 GHz	-164 dBm	-172 dBm
RF Preselector On,	150 kHz to 1 MHz		-100 dBm
Preamp Off or On, LNA	1 to 10 MHz		-125 dBm
On	10 to 30 MHz		-165 dBm
	30 to 50 MHz	-163 dBm	-174 dBm
	50 to 100 MHz	-165 dBm	-174 dBm
	100 to 150 MHz	-166 dBm	-174 dBm
	150 MHz to 2 GHz	-166 dBm	-174 dBm
	2 to 3.6 GHz	-165 dBm	-174 dBm
RF Preselector Off/On,	3.5 to 8.4 GHz	-163 dBm	-172 dBm
Preamp Off, LNA On	8.3 to 13.6 GHz	-164 dBm	-171 dBm
	13.5 to 19 GHz	-162 dBm	-170 dBm
	19 to 22 GHz	-160 dBm	-170 dBm

	22 to 26.5 GHz	-157 dBm	-168 dBm
	26.4 to 34.5 GHz	-155 dBm	-167 dBm
	34.4 to 40 GHz	-149 dBm	-163 dBm
	40 to 42 GHz	-149 dBm	-162 dBm
	42 to 43 GHz	-146 dBm	-160 dBm
	43 to 44 GHz	-146 dBm	
RF Preselector Off/On, Preamp On, LNA On	3.5 to 8 GHz	-165 dBm	-174 dBm
	8 to 13.6 GHz	-166 dBm	-174 dBm
	13.5 to 19 GHz	-165 dBm	-173 dBm
	19 to 22 GHz	-164 dBm	-173 dBm
	22 to 26.5 GHz	-163 dBm	-172 dBm
	26.4 to 34.5 GHz	-160 dBm	-170 dBm
	34.4 to 40 GHz	-158 dBm	-169 dBm
	40 to 42 GHz	-158 dBm	-168 dBm
	42 to 43 GHz	-156 dBm	-167 dBm
	43 to 44 GHz	-149 dBm	

Indicated noise in CISPR bandwidth Typical (including NFE)¹

Calculated from Input 1 DANL performance, 0 dB input attenuation, EMI receiver mode, without Option WF1; EMI-AVG detector; CISPR BW

RF/MW (Option 503/508/526)

RF Preselector On, Preamp Off	1 Hz (1 Hz RBW)	32 dB μ V, nominal
	10 Hz (1 Hz RBW)	2 dB μ V, nominal
	20 Hz (1 Hz RBW)	-19 dB μ V
	100 Hz (10 Hz RBW)	-11 dB μ V
	1 kHz (100 Hz RBW)	-9 dB μ V
	9 to 50 kHz (200Hz RBW)	-14 dB μ V
	150 kHz to 1 MHz (9 kHz RBW)	-8 dB μ V
	1 to 30 MHz (9 kHz RBW)	-12 dB μ V
	30 MHz to 1 GHz (120 kHz RBW)	-3 dB μ V
	1 to 2.5 GHz (1 MHz RBW)	8 dB μ V
	2.5 to 3.6 GHz (1 MHz RBW)	11 dB μ V
	3.6 to 8.4 GHz (1 MHz RBW)	8 dB μ V
	8.4 to 13.6 GHz (1 MHz RBW)	11 dB μ V
	13.6 to 17.1 GHz (1 MHz RBW)	12 dB μ V
	17.1 to 25 GHz (1 MHz RBW)	14 dB μ V
	25 to 26.5 GHz (1 MHz RBW)	18 dB μ V

1. Typical Indicated Noise including NFE = Typical DANL + RBW correction – DANL Improvement with NFE +107.

RF Preselector On, Preamp On, LNA Off	1 kHz (100 Hz RBW)	-24 dB μ V
	9 to 150 kHz (200 Hz RBW)	-31 dB μ V
	150 kHz to 1 MHz (9 kHz RBW)	-17 dB μ V
	1 to 30 MHz (9 kHz RBW)	-20 dB μ V
	30 MHz to 1 GHz (120 kHz RBW)	-11 dB μ V
	1 to 2.5 GHz (1 MHz RBW)	-2 dB μ V
	2.5 to 3.6 GHz (1 MHz RBW)	0 dB μ V
	3.6 to 8.4 GHz (1 MHz RBW)	-2 dB μ V
	8.4 to 13.6 GHz (1 MHz RBW)	-2 dB μ V
	13.6 to 17.1 GHz (1 MHz RBW)	-3 dB μ V
	17.1 to 25 GHz (1 MHz RBW)	1 dB μ V
	25 to 26.5 GHz (1 MHz RBW)	2 dB μ V
RF Preselector On, Preamp Off, LNA On	30 MHz to 1 GHz (120 kHz RBW)	-11 dB μ V
	1 to 2.5 GHz (1 MHz RBW)	-5 dB μ V
	2.5 to 3.6 GHz (1 MHz RBW)	-3 dB μ V
	3.6 to 8.4 GHz (1 MHz RBW)	-4 dB μ V
	8.4 to 13.6 GHz (1 MHz RBW)	-3 dB μ V
	13.6 to 17.1 GHz (1 MHz RBW)	-2 dB μ V
	17.1 to 25 GHz (1 MHz RBW)	1 dB μ V
RF Preselector Off/On, Preamp On, LNA On	25 to 26.5 GHz (1 MHz RBW)	3 dB μ V
	3.6 to 8.4 GHz (1 MHz RBW)	-5 dB μ V
	8.4 to 13.6 GHz (1 MHz RBW)	-4 dB μ V
	13.6 to 17.1 GHz (1 MHz RBW)	-4 dB μ V
	17.1 to 25 GHz (1 MHz RBW)	0 dB μ V
Millimeter-Wave (Option 544)	25 to 26.5 GHz (1 MHz RBW)	0 dB μ V
	1 Hz (1 Hz RBW)	32 dB μ V, nominal
RF Preselector On, Preamp Off	10 Hz (1 Hz RBW)	2 dB μ V, nominal
	20 Hz (1 Hz RBW)	-9 dB μ V
	100 Hz (10 Hz RBW)	-11 dB μ V
	1 kHz (100 Hz RBW)	-9 dB μ V
	9 to 50 kHz (200Hz RBW)	-14 dB μ V
	150 kHz to 1 MHz (9 kHz RBW)	-8 dB μ V
	1 to 30 MHz (9 kHz RBW)	-12 dB μ V
	30 MHz to 1 GHz (120 kHz RBW)	-3 dB μ V
	1 to 2.5 GHz (1 MHz RBW)	8 dB μ V
	2.5 to 3.6 GHz (1 MHz RBW)	11 dB μ V
	3.6 to 13.6 GHz (1 MHz RBW)	12 dB μ V
	13.6 to 17.1 GHz (1 MHz RBW)	14 dB μ V
	17.1 to 25 GHz (1 MHz RBW)	18 dB μ V
	25 to 26.5 GHz (1 MHz RBW)	19 dB μ V
	26.5 to 34.5 GHz (1 MHz RBW)	18 dB μ V
	34.5 to 40 GHz (1 MHz RBW)	22 dB μ V
	40 to 42 GHz (1 MHz RBW)	24 dB μ V
	42 to 44 GHz (1 MHz RBW)	27 dB μ V

RF Preselector On, Preamp On, LNA Off	1 kHz (100 Hz RBW)	-24 dB μ V	
	9 to 150 kHz (200 Hz RBW)	-31 dB μ V	
	150 kHz to 1 MHz (9 kHz RBW)	-17 dB μ V	
	1 to 30 MHz (9 kHz RBW)	-20 dB μ V	
	30 MHz to 1 GHz (120 kHz RBW)	-11 dB μ V	
	1 to 2.5 GHz (1 MHz RBW)	-2 dB μ V	
	2.5 to 3.6 GHz (1 MHz RBW)	0 dB μ V	
	3.6 to 8.4 GHz (1 MHz RBW)	-2 dB μ V	
	8.4 to 13.6 GHz (1 MHz RBW)	-2 dB μ V	
	13.6 to 17.1 GHz (1 MHz RBW)	-3 dB μ V	
	17.1 to 25 GHz (1 MHz RBW)	1 dB μ V	
	25 to 34.5 GHz (1 MHz RBW)	2 dB μ V	
	34.5 to 40 GHz (1 MHz RBW)	5 dB μ V	
	40 to 42 GHz (1 MHz RBW)	6 dB μ V	
	42 to 43 GHz (1 MHz RBW)	8 dB μ V	
	43 to 44 GHz (1 MHz RBW)	18 dB μ V	
RF Preselector On, Preamp Off, LNA On	30 MHz to 1 GHz (120 kHz RBW)	-11 dB μ V	
	1 to 2.5 GHz (1 MHz RBW)	-5 dB μ V	
	2.5 to 3.6 GHz (1 MHz RBW)	-3 dB μ V	
	3.6 to 17.1 GHz (1 MHz RBW)	-2 dB μ V	
	17.1 to 25 GHz (1 MHz RBW)	3 dB μ V	
	25 to 34.5 GHz (1 MHz RBW)	5 dB μ V	
	34.5 to 40 GHz (1 MHz RBW)	9 dB μ V	
	40 to 42 GHz (1 MHz RBW)	10 dB μ V	
	42 to 43 GHz (1 MHz RBW)	13 dB μ V	
	43 to 44 GHz (1 MHz RBW)	19 dB μ V	
RF Preselector Off/On, Preamp On, LNA On	3.6 to 8.4 GHz (1 MHz RBW)	-5 dB μ V	
	8.4 to 17.1 GHz (1 MHz RBW)	-4 dB μ V	
	17.1 to 26.5 GHz (1 MHz RBW)	0 dB μ V	
	26.5 to 34.5 GHz (1 MHz RBW)	2 dB μ V	
	34.5 to 42 GHz (1 MHz RBW)	4 dB μ V	
	42 to 43 GHz (1 MHz RBW)	5 dB μ V	
	43 to 44 GHz (1 MHz RBW)	18 dB μ V	
Phase noise ¹	Offset	Specification	Typical
20 to 30 °C, CF = 1 GHz	10 Hz		-80 dBc/Hz, nominal
	100 Hz	-91 dBc/Hz	-100 dBc/Hz, typical
	1 kHz	-109 dBc/Hz	-112 dBc/Hz, typical
	10 kHz	-113 dBc/Hz	-114 dBc/Hz, typical
	100 kHz	-116 dBc/Hz	-117 dBc/Hz, typical
	1 MHz	-134 dBc/Hz	-135 dBc/Hz, typical
	10 MHz		-148 dBc/Hz, nominal

1. For nominal phase noise plot, please refer to Page 49, N9048B Specification Guide, Publish number N9048-90010

PowerSuite Measurement Specifications

Channel Power		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.82 dB	± 0.23 dB (95th percentile)
Occupied bandwidth		
Frequency accuracy		± [span/1000] nominal
Adjacent channel power		
Accuracy, W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)	Adjacent	Alternate
MS	± 0.14 dB	± 0.21 dB
BTS	± 0.49 dB	± 0.44 dB
Dynamic range		
Without noise correction	-73 dB typical	-79 dB typical
With noise correction	-78 dB typical	-82 dB typical
Offset channel pairs measured	1 to 6	
ACP measurement and transfer time (fast method)	14 ms nominal ($\sigma = 0.2$ dB)	
Multiple number of carriers measured	Up to 12	
Power statistics CCDF		
Histogram resolution	0.01 dB	
Harmonic distortion		
Maximum harmonic number	10th	
Result	Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
Burst power		
Methods	Power above threshold, power within burst width	
Result	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
Spurious emission		
W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions		
Dynamic range	96.7 dB	101.7 dB typical
Absolute sensitivity	-85.4 dBm	
Spectrum emission mask (SEM)		
cdma2000® (750 kHz offset)		
Relative dynamic range (30 kHz RBW)	78.9 dB	85 dB typical
Absolute sensitivity	-100.7 dBm	
Relative accuracy	± 0.12 dB	
3GPP W-CDMA (2.515 MHz offset)		
Relative dynamic range (30 kHz RBW)	81.9 dB	88.2 dB typical
Absolute sensitivity	-100.7 dBm	
Relative accuracy	± 0.12 dB	

General Specifications

Temperature range

Operating	0 to 55 °C
Storage	-40 to 70 °C

EMC

Complies with the essential requirements of the European EMC Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):

- IEC/EN 61326-2-1
- CISPR 11, Group 1, Class B
- AS/NZS CISPR 11
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

Radio disturbance measuring apparatus

CISPR 16-1-1	The features in this instrument comply with the performance requirements of this basic standard
--------------	---

Safety

Complies with European Low Voltage Directive 2006/95/EC

- IEC/EN 61010-1
- Canada: CSA C22.2 No. 61010-01
- USA: UL 61010-1

Acoustic noise emission

LpA < 70 dB	Geraeuschemission
Operator position	LpA < 70 dB
Normal position	Am Arbeitsplatz
Per ISO 7779	Normaler Betrieb
	Nach DIN 45635 t.19

Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.

Power requirements

Voltage and frequency (nominal)	100/120 V, 50/60/400 Hz	The instruments can operate with mains supply voltage fluctuations up to $\pm 10\%$ of the nominal voltage
	220/240 V, 50/60 Hz	
Power consumption		
On	630 W maximum	
Standby	20 W	
Typical instrument configuration	Power (nominal)	
Base PXE instrument	300 W	
Adding Option WF1 to base instrument	+150 W	

Display	
Resolution	1280 x 800
Size	269 mm (10.6 in.) diagonal (nominal) capacitive multi-touch screen
Data storage	
Internal	Removable solid state drive (\geq 160 GB standard)
External	Supports USB 3.0/2.0 compatible memory devices
Weight (without options)	
Net	
RF/MW (Option 503/508/526)	24 kg (52 lbs.) (nominal)
Millimeter-Wave (Option 544)	27 kg (60 lbs.) (nominal)
Shipping	
RF/MW (Option 503/508/526)	36 kg (79 lbs.) (nominal)
Millimeter-Wave (Option 544)	39 kg (86 lbs.) (nominal)
Dimensions	
Height	177 mm (7 in)
Width	426 mm (16.8 in)
Length	556 mm (21.9 in)
Calibration cycle	

The recommended calibration cycle is one year; calibration services are available through Keysight service centers

Inputs and Outputs

Front panel

RF input

RF input 1 Connector	Type-N female, 50 Ω nominal (standard for Option 503, 508 and 526) 2.4 mm male, 50 Ω nominal (standard for Option 544) 3.5 mm male, 50 Ω (Option C35, with Option 526 only)
RF input 2 Connector	Type-N female, 50 Ω nominal (standard)

External Mixing (Option EXM)

Connection port

Connector	SMA, female
Impedance	50 Ω, nominal
Functions	Triplexed for LO output, IF input, and mixer bias

Mixer bias range

± 10 mA in 10 μA step

IF input center frequency

≤ 25 MHz IF path

322.5 MHz

40 MHz BW IF path

250.0 MHz

LO output frequency range

3.75 to 14.0 GHz

Probe power

Voltage/current	+15 Vdc, ± 7% at 150 mA max (nominal) -12.6 Vdc, ± 10% at 150 mA max (nominal)
-----------------	---

USB ports

Host (3 ports)

Standard	One compatible with USB 3.0; Two compatible with USB 2.0
Connector	USB Type-A female
Output current	
Port marked with Lightning Bolt	1.2 A (nominal)
Port not marked with Lightning Bolt	0.5 A

Headphone jack

Connector	Miniature stereo audio jack 3.5 mm
-----------	---------------------------------------

Rear panel

10 MHz out

Connector	BNC female, 50 Ω (nominal)
Output amplitude	≥ 0 dBm (nominal)
Frequency	10 MHz × (1+ frequency reference accuracy)

Ext Ref In

Connector	BNC female, 50 Ω (nominal)
Input amplitude range	-5 to 10 dBm (nominal)
Input frequency	1 to 50 MHz (nominal)
Frequency lock range	± 2 × 10 ⁻⁶ of ideal external reference input frequency

Trigger 1 and 2 inputs

Connector	BNC female
Impedance	> 10 kΩ (nominal)
Trigger level range	-5 to 5 V

Trigger 1 and 2 outputs	
Connector	BNC female
Impedance	> 10 kΩ (nominal)
Trigger level range	0 to 5 V (CMOS)
Monitor output 1	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768
Monitor output 2	
Connector	Mini DisplayPort
Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
Connector	BNC female
SNS Series noise source	For use with Keysight Technologies' SNS series noise sources
Analog out	
Connector	BNC female (used by Option YAS)
USB ports	
Host, Super Speed (2 ports)	
Standard	Compatible with USB 3.0
Connector	USB Type-A female
Output current	0.9 A (nominal)
Host, stacked with LAN (1 port)	
Standard	Compatible with USB 3.0
Connector	USB Type-A female
Output current	0.5 A (nominal)
Device (1 port)	
Standard	Compatible with USB 3.0
Connector	USB Type-B female
GPIB interface	
Connector	IEEE-488 bus connector
GPIB codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIB mode	Controller or device
LAN TCP/IP interface	
Standard	1000Base-T
Connector	RJ45 EtherTwist
Aux I/O connector	
Connector	25-pin D-SUB

IQ Analyzer

Resolution bandwidth (spectrum measurement)

Range	Overall	100 mHz to 3 MHz
	Span = 1 MHz	50 Hz to 1 MHz
	Span = 10 kHz	1 Hz to 10 kHz
	Span = 100 Hz	100 mHz to 100 Hz

Window shapes

Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

Analysis

bandwidth	Standard	Optional
	10 MHz	25 MHz (Option B25), 40 MHz (Option B40)

IF frequency response (standard 10 MHz IF path)

Demodulation and FFT response relative to the center frequency

Center frequency	Span	Preselector	Max. error	RMS (nominal)
f < 3.6 GHz	≤ 10 MHz	NA	± 0.4 dB	0.04 dB
3.6 GHz ≤ f < 26.5 GHz	≤ 10 MHz	On		0.25 dB
26.5 GHz ≤ f ≤ 44 GHz	≤ 10 MHz	On		0.35 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency	Span	Preselector	Peak-to-Peak	RMS
20 MHz ≤ f < 3.6 GHz	≤ 10 MHz	NA	± 0.5°	0.2°
3.6 GHz ≤ f < 26.5 GHz	≤ 10 MHz	On	± 1.5°	0.4°
26.5 GHz ≤ f ≤ 44 GHz	≤ 10 MHz	On	± 1.5°	0.5°

Data acquisition

Time record length	(IQ analyzer)	4,000,000 IQ sample pairs
Sample rate		
IF path ≤ 25 MHz		100 Ms/s
IF Path = 40 MHz		200 MS/s
ADC resolution		
IF path ≤ 25 MHz		16 bits
IF Path = 40 MHz		12 bits

IF frequency response (25 MHz IF path, demodulation and FFT response relative to the center frequency)

Center frequency	Span	Preselector	Max. error	RMS (nominal)
f < 3.6 GHz	≤ 25 MHz	NA	± 0.45 dB	0.05 dB
3.6 GHz ≤ f < 26.5 GHz	≤ 25 MHz	On		0.45 dB
26.5 GHz ≤ f ≤ 44 GHz	≤ 25 MHz	On		0.55 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency	Span	Preselector	Peak-to-Peak	RMS
20 MHz ≤ f < 3.6 GHz	≤ 25 MHz	NA	± 0.5°	0.2°

IF frequency response (40 MHz IF path, demodulation and FFT response relative to the center frequency)

Center frequency	Span	Preselector	Max. error	RMS (nominal)
30 MHz ≤ f < 3.6 GHz	≤ 40 MHz	NA	± 0.4 dB	0.07 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency	Span	Preselector	Peak-to-Peak	RMS
20 MHz ≤ f < 3.6 GHz	≤ 40 MHz	NA	± 0.5°	0.12°

Time Domain Scan (TDS)

Frequency range

Standard time domain scan (Accelerated TDS = Off) Option N9048TDSB	20 Hz to 44 GHz
---	-----------------

Accelerated time domain scan (Accelerated TDS = On) Option N9048WT1B or N9048WT2B	30 MHz to 3.2 GHz
--	-------------------

Trace detectors

CISPR detectors: peak, quasi-peak, EMI average, RMS average negative peak, voltage average	
---	--

Maximum FFT bandwidth

Frequency range	Accelerated TDS = Off	Accelerated TDS = On
20 Hz to 30 MHz	30 MHz	
30 MHz to 3.2 GHz	59 MHz	350 MHz
3.2 to 3.6 GHz	59 MHz	
3.6 to 44 GHz	12.5 MHz	

Real time scan bandwidth

Option N9048WT1B	170 MHz
Option N9048WT2B	350 MHz

FFT overlap

Measurement time	10 µs to 30 s
------------------	---------------

Trace point range	1 to 4,000,001
-------------------	----------------

Frequency step size	0.25 × resolution bandwidth
---------------------	-----------------------------

Resolution bandwidth (RBW)

EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz
EMI bandwidths (Mil-STD-461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz

Measurement speed	Accelerated TDS = Off	Accelerated TDS = On
-------------------	-----------------------	----------------------

CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	110 ms (nominal)
--	------------------

CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak + EMI average detector	2 s (nominal)
---	---------------

CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	500 ms (nominal)	100 ms (nominal)
---	------------------	------------------

CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak + EMI average detector	46.4 s (nominal)	5.8 s (nominal)
---	------------------	-----------------

RF preselector filters

Filter band	Accelerated TDS = Off	Accelerated TDS = On	Filter type	6 dB Bandwidth (nominal)
150 kHz	x		Fixed lowpass	289 kHz (-3 dB corner frequency)
150 kHz to 30 MHz	x		Fixed bandpass	36 MHz
30 to 300 MHz		x	Fixed bandpass	320 MHz
30 to 52 MHz	x		Fixed bandpass	28 MHz
52 to 75 MHz	x		Fixed bandpass	39 MHz
75 to 120 MHz	x		Fixed bandpass	63 MHz
120 to 165 MHz	x		Fixed bandpass	71 MHz
165 to 210 MHz	x		Fixed bandpass	69 MHz
210 to 255 MHz	x		Fixed bandpass	71 MHz
255 to 300 MHz	x		Fixed bandpass	68 MHz
300 to 650 MHz		x	Fixed bandpass	515 MHz
300 to 475 MHz	x		Fixed bandpass	284 MHz
475 to 650 MHz	x		Fixed bandpass	305 MHz
650 MHz to 1 GHz		x	Fixed bandpass	550 MHz
650 to 825 MHz	x		Fixed bandpass	302 MHz
825 MHz to 1 GHz	x		Fixed bandpass	314 MHz
1 GHz	x	x	Fixed highpass	912 MHz (-3 dB corner frequency)
1.7 GHz	x	x	Fixed highpass	1.56 GHz (-3 dB corner frequency)
2.9 GHz	x	x	Fixed highpass	2.29 GHz (-3 dB corner frequency)

Related Literature

Publication title	Publication number
N9048B PXE EMI Receiver Configuration Guide	5992-3403EN
N9048B PXE EMI Receiver Specifications Guide	N9048-90010

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

