

Ring / Multidrop Fibre Converter PROFIBUS

ODW-710-F2

- ⌘ Numerous Fibre Configuration Options
 - Up to 120 km distance
 - BiDi support (single fibre)
 - Multimode and singlemode SFPs in single ring
- ⌘ Designed for use in Industrial applications
 - Dual 10 V to 60VDC power input
 - 500,000h MTBF according to MIL HDBK-217K
 - Compact housing with integral DIN rail clip
- ⌘ Compliant to EN 50170 PROFIBUS DP standard
 - Supports all standard data rates to 12 Mbit/s
 - Standard 9 pin PROFIBUS D-sub connection
 - Auto negotiation of data rate
- ⌘ Extensive resilient fibre optic network solutions
 - Ring Recovery < 1 ms
 - Latency < 0.5 ms allowing 250 units per ring
 - Galvanically isolated fault status output



EN 61000-6-2
Industrial Immunity

EN 61000-6-3
Residential Emission

EN 61000-6-4
Industrial Emission

EN 50121-4
Railway Trackside

The ODW-710-F2 has been designed to allow the use of fibre optic cables on PROFIBUS DP networks. The design allows the use of a range of Westermo verified SFP (Small Form Pluggable) transceivers which can provide solutions with, for example, only a single fibre or distances up to 120 km. Both multidrop networks and redundant rings can be formed using a mixture of transceiver types.

This unit has been designed for industrial use where the requirement is for a long and reliable service life in a harsh environment. To ensure this reliable operation we manufacture using the highest quality components.

The ODW-710 can be used on all PROFIBUS DP networks to extend the operational network size beyond the normal constraints of the copper cable. All the data rates defined in EN50170 are supported.


Large ring networks can be created to provide network resilience to guarantee system functionality even if a cable is damaged. The ring recovery time ensures that the network devices are not aware of the failure. The fault contact provides a method to communicate network failures.

Ordering Information

Art.no	Description
3651-0712	ODW-710-F2
3125-0001	PS-30, Power supply, DIN mounted (Accessories)

Specifications ODW-710-F2

Dimensional drawing

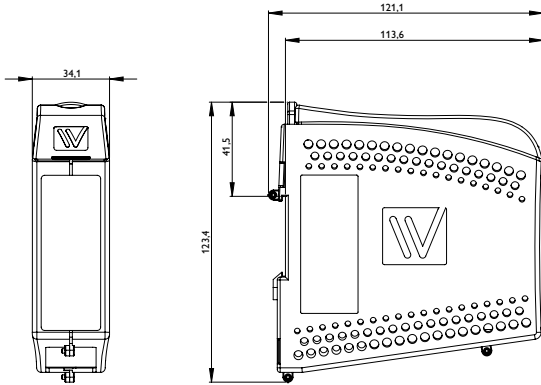

Dimension W x H x D 35 x 121 x 119 mm (1.37 x 4.76 x 4.68 in)
 Weight 0.26 kg
 Degree of protection IP 21

Power

Operating voltage	10 to 60 VDC and 20 to 30 VAC
Rated current	400 mA @ 12 V 200 mA @ 24 V 100 mA @ 48 V

Interfaces

Status	1 x Detachable screw terminal
PROFIBUS DP (RS-485)	1 x 9 600 bit/s – 12 Mbit/s
FX (Fibre)	2 x LC Duplex or LC Simplex

Temperature

Operating	-40 to +60°C (-40 to +140°F)
Storage & Transport	-40 to +60°C (-40 to +140°F)

Agency approvals and standards compliance

EMC	EN 61000-6-1, Immunity residential environments
	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-3, Emission residential environments
	EN 61000-6-4, Emission industrial environments
	EN 55022, Emission IT equipment, class A
	EN 55024, Immunity IT equipment
	FCC part 15 Class A
	EN 50121-4, Railway signalling and telecommunications apparatus
	IEC 62236-4, Railway signalling and telecommunications apparatus
DNV Standard for Certification no. 2.4	
Safety	UL/CSA/IEC/EN 60950-1, IT equipment