

FVA-600 Variable Attenuator



SPEC SHEET

Delivers the highest performance within handheld optical attenuators on the market.

KEY FEATURES

- Most compact and rugged portable attenuator on the market
- Low cost of ownership: three-year warranty and recommended calibration interval
- Three operating modes: Absolute, Relative and Power
- Backlit display, optimized for dim environments
- USB-based remote control capability, for easy test routine integration
- Rechargeable Li-ion battery

APPLICATIONS

- Handles high power up to 24 dBm, suiting any application, including CATV and telco
- BER testing-ready: high optical resolution of 0.01 dB
- FTTx-ready: standard 1310, 1490, 1550 and 1625 nm wavelengths

COMPLEMENTARY PRODUCTS



SONET/SDH Test Modules
FTB-8115 – FTB-8120
FTB-8130 – FTB-8140




Optical Light Sources
FLS-300
FLS-600



Optical Power Meters
FPM-300
FPM-600



Assessing
Next-Gen Networks

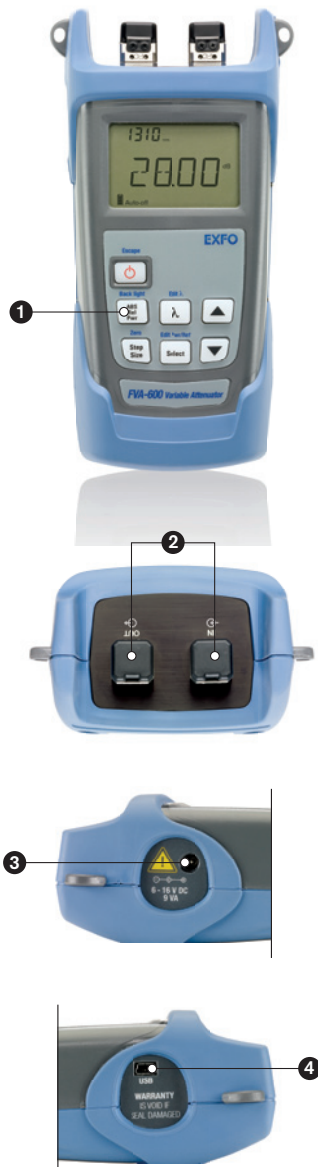

- 1 Backlit keyboard and screen
- 2 In/out universal optical interfaces
- 3 AC adapter
- 4 USB port for remote applications

SPECIFICATIONS^a

Fiber type (µm)	9/125
Calibration wavelengths (nm)	1310/1550
Wavelength range (nm)	1250 to 1625
Wavelength increment (nm)	1
Maximum attenuation (dB)	65
IL (dB) ^{b, c, d}	≤1.5
Resolution (dB)	0.01
Linearity (dB) ^{b, c, e}	±0.1
Repeatability 2σ (dB) ^c	±0.1
Optical return loss (dB) ^{f, h, i}	>50
Max. input power (dBm) ^g	24
Battery life (hours) ^e	>300
Warranty and recommended calibration interval (years)	3

GENERAL SPECIFICATIONS

Size (H x W x D)	190 mm x 100 mm x 62 mm (7 1/2 in x 4 in x 2 1/2 in)
Weight	0.6 kg (1.3 lb)
Temperature	operating: -10 °C to 50 °C (14 °F to 122 °F) storage: -40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity	0 % to 95 % non-condensing
Power	AC adapter and rechargeable Li-ion battery

STANDARD ACCESSORIES

User guide, Certificate of Calibration, quick reference sticker in five languages, AC adapter/charger, connector adapter (EUI-XX), lithium ion battery, shoulder strap, semi-rigid carrying case, USB cable, instruction manual on CD

Notes

- a. At 23 °C ± 3 °C.
- b. At 1310 nm ± 30 nm.
- c. At 1550 nm ± 40 nm.
- d. Excluding connectors.
- e. Typical.
- f. At minimum IL.
- g. Prolonged exposure to maximum input power will impair linearity calibration.
- h. At 1310 nm ± 1 nm and 1550 nm ± 1 nm.
- i. Including connectors.

ORDERING INFORMATION

FVA-600-B-XX

Connector

- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG
- EI-EUI-89 = UPC/FC narrow key
- EI-EUI-90 = UPC/ST
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000
- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Example: FVA-600-B-EI-EUI-89

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: +1 418 683-0211 | Fax: +1 418 683-2170 | info@EXFO.com

Toll-free: +1 800 663-3936 (USA and Canada) | www.EXFO.com

EXFO America	3701 Plano Parkway, Suite 160 Plano, TX 75075 USA	Tel.: +1 800 663-3936	Fax: +1 972 836-0164
EXFO Asia	100 Beach Road, #22-01/03 Shaw Tower SINGAPORE 189702	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	36 North, 3 rd Ring Road East, Dongcheng District Room 1207, Tower C, Global Trade Center Beijing 100013 P. R. CHINA	Tel.: + 86 10 5825 7755	Fax: +86 10 5825 7722
EXFO Europe	Omega Enterprise Park, Electron Way Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 2380 246810	Fax: +44 2380 246801
EXFO NetHawk	Elektronikkatie 2 FI-90590 Oulu, FINLAND	Tel.: +358 (0)403 010 300	Fax: +358 (0)8 564 5203
EXFO Service Assurance	270 Billerica Road Chelmsford, MA 01824 USA	Tel.: +1 978 367-5600	Fax: +1 978 367-5700

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the Web version takes precedence over any printed literature.