

# GSM modem

## GDW-11 EX

- ⌘ Cost effective legacy remote access solution
  - Traditional AT command modem
  - RS-232 up to 11 bit, 115.2 kbit/s
  - Dual band GSM 900/1800 MHz
- ⌘ Designed for use in harsh industrial applications
  - 10 – 60 VDC power input
  - Reverse polarity protection
  - ATEX Zone 2 – Ex nA IIC T4 Gc
- ⌘ Robust for long service life
  - 1,100,000 hours MTBF to MIL-HDBK-217K
  - –25 to +50°C (–13 to +122°F) with no moving parts
  - Industrial EMC, shock and vibration testing
- ⌘ Easy to use
  - Windows drivers and GD-tool configuration software
  - Event triggered SMS, DTR and data dialing
  - RS-232, 9-pin D-sub and screw terminals



**EN 61000-6-2**  
Industrial Immunity

**EN 61000-6-3**  
Residential Emission

**EN 50121-4**  
Railway Trackside

The GDW-11 EX is an ATEX certified modem designed to allow connection of legacy serial equipment over a GSM/GPRS network. The AT command driven modem operates over the GSM/GPRS networks providing speed up to 14.4 kbit/s on GSM or 85.6 kbit/s when using GPRS.

The GDW-11 EX is designed for use in heavy duty industrial applications. The wide power range, galvanic isolation, guarantees communication in the worst environments.

Only industrial grade components are used which gives the GDW-11 EX an MTBF of 1,100,000 hours and ensures a long service life. A wide operating temperature range of –25 to +50°C (–13 to +122°F) is achieved with no moving parts.

The GDW-11 EX has been tested both by Westermo and external test houses to meet many EMC, isolation, vibration and shock standards, all to the highest levels suitable for heavy industrial environments and rail trackside applications.


The modem is simple to configure both by DIP switches as well as by the Westermo GD-tool software; standard commands can easily be entered, and saved configurations downloaded. RS-232 connections can be made using screw connections as well as the standard D-sub. The modem is designed to be connected to devices with no ability to control dialing so special functions like data dialing and DTR dialing are provided to enable these devices to automatically establish connections.

### Ordering Information

Art.no	Description
3615-5001	GDW-11 EX, 901 / 1 800 MHz, Data, Fax, SMS, TCP/IP, RS-232, 10–60 VDC, ATEX

# Specifications GDW-11 Ex

## Dimensional drawing

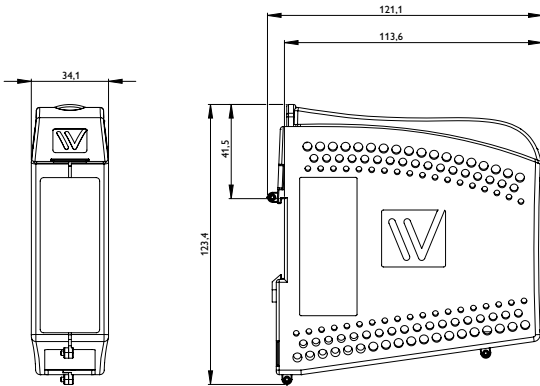

Dimension W x H x D 34 x 123 x 121 mm (1.33 x 4.84 x 4.76)

Weight 0.2 kg

Degree of protection IP 21

### Power

Operating voltage	10 to 60 VDC
Rated current	350 mA @ 12 VDC 150 mA @ 24 VDC 75 mA @ 48 VDC

### Interfaces

RS-232	1 x 300 bit/s – 115.2 kbit/s
Antenna	1 x GSM900 TX 880 – 915 and RX 925 – 960 MHz 1 x GSM1800 TX 1710 – 1785 and RX 1805 – 1880 MHz
SIM	1 x SIM slot (3 volts SIM supported)

### Temperature

Operating	-25 to +50°C (-13 to +122°F)
Storage & Transport	-30 to +85°C (-22 to +185°F)
Maximum surface temperature	135°C (275°F) (temperature class T4)

### Agency approvals and standards compliance

EMC	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-3, Emission residential environments
	EN 55024, Immunity IT equipment
	FCC part 15 Class B
	EN 50121-4, Railway signalling and telecommunications apparatus
	IEC 62236-4, Railway signalling and telecommunications apparatus
Safety	EN 60950, IT equipment
Atex	EN 60079-0, Explosive atmospheres – General requirements
	EN 60079-15, Explosive atmospheres – Construction, test and marking of type of protection “n” electrical apparatus