

# Quick Installation Guide

## TGPS-9168GT-M12




## EN50155 24-port managed Gigabit PoE Ethernet switch

### Introduction

The **TGPS-9168GT-M12** is a managed Redundant Ring Ethernet switch with 16x10/100/1000Base-T(X) P.S.E. ports and 8x10/100/1000Base-T(X) ports. The switch supports various Ethernet redundancy protocols such as O-Ring (recovery time < 30ms over 250 units of connection), O-Chain and MSTP (RSTP/STP compatible) to protect your mission-critical applications from network interruptions or temporary malfunctions. With EN50155 compliance and M12 connectors, the device is a perfect choice for the toughest industrial environments as the features can ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. The device also supports Power-over-Ethernet which enables electrical power (up to 15.4 watts) to be transmitted along with data over standard twisted-pair Ethernet cables. Supporting wide operating temperature from -40 to 75 degrees, the device can be managed centrally via Open-Vision, the Web-based interface, Telnet and console (CLI) configuration.

### Package Contents





The device is shipped with the following items. If any of these items is missing or damaged, please contact your customer service representative for assistance.

Contents	Pictures	Number
TGPS-9168GT-M12		1
CD		1
QIG		1


### Preparation

Before you begin installing the device, make sure you have all of the package contents available and a PC with Microsoft Internet Explorer 6.0 or later, for using web-based system management tools.


#### Safety & Warnings

-  **Elevated Operating Ambient:** If installed in a closed environment, make sure the operating ambient temperature is compatible with the maximum ambient temperature (T<sub>ma</sub>) specified by the manufacturer.
-  **Reduced Air Flow:** Make sure the amount of air flow required for safe operation of the equipment is not compromised during installation.
-  **Mechanical Loading:** Make sure the mounting of the equipment is not in a hazardous condition due to uneven mechanical loading.
-  **Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

#### Dimension

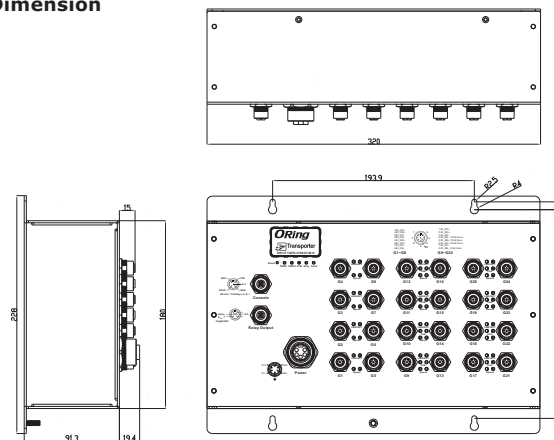


#### Panel Layouts

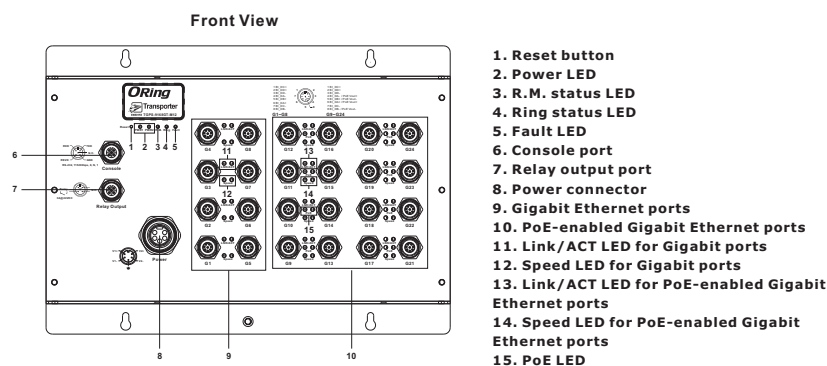


### Installation

#### Wall-mount

The device can be fixed to the wall. Follow the steps below to install the device on the wall.  
**Step 1:** Hold the device upright against the wall  
**Step 2:** Insert four screws through the large opening of the keyhole-shaped apertures at the top and bottom of the unit and fasten the screws to the wall with a screwdriver.  
**Step 3:** Slide the device downwards and tighten the four screws for added stability.



 Instead of screwing the screws in all the way, it is advised to leave a space of about 2mm to allow room for sliding the switch between the wall and the screws.

#### Wiring

For pin assignments of power, console and relay output ports, please refer to the following tables.

#### Grounding


Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the grounding pin on the power connector to the grounding surface prior to connecting devices.

#### Power port pinouts

The device supports two sets of power supplies and uses the M23 5-pin female connector on the front panel for dual power inputs.  
**Step 1:** Insert a power cable to the power connector on the device.  
**Step 2:** Rotate the outer ring of the cable connector until a snug fit is achieved. Make sure the connection is tight.



#### Console port pinouts

 The switch has one RS-232 (M12 5pin) console port, located on the front panel. Use a M12-to-DB9 console cable to connect the console port to your PC's COM port.



#### Relay output port pinouts

The switch uses the M12 A-coded 5-pin female connector on the front panel for relay output. Use a cable with an M12 A-coded 5-pin male connector to connect the relay. The relay contacts will detect user-configured events and form an close circuit when an event is triggered.



#### Network Connection

The device provides Ethernet ports in M12 connector type. According to the link type, the switch uses CAT 3, 4, 5, 5e UTP cables to connect to any other network devices (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	M12 A-coding connector
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	M12 A-coding connector
1000BASE-T	Cat. 5/Cat. 5e 100-ohm UTP	UTP 100 m (328 ft)	M12 A-coding connector

For pin assignments of the Ethernet ports, please refer to the following tables.



8-Pin Gigabit Non-PoE Port Definition	
PIN	Definition
1	BI_DC+
2	BI_DD+
3	BI_DD-
4	BI_DA-
5	BI_DB+
6	BI_DA+
7	BI_DC-
8	BI_DB-

8-Pin Gigabit PoE Port Definition	
PIN	Definition
1	BI_DC+
2	BI_DD+
3	BI_DD-
4	BI_DA- with PoE Vout+
5	BI_DB+ with PoE Vout-
6	BI_DA+ with PoE Vout+
7	BI_DC-
8	BI_DB- with PoE Vout-

# Quick Installation Guide

## TGPS-9168GT-M12

## EN50155 24-port managed Gigabit PoE Ethernet switch


### Configurations

After installing the switch and connecting cables, the green power LED should turn on. Please refer to the following tablet for LED indication.


LED	Color	Status	Description
PWR1	Green	On	DC power module 1 activated
PWR2	Green	On	DC power module 2 activated
R.M	Green	On	Device operating in Ring Master mode
Ring	Green	On	Ring enabled
		Blinking	Ring structure is broken
Fault	Amber	On	Errors occur (i.e. power failure or port malfunctioning)
10/100/1000Base-T(X) P.S.E Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
PoE	Green	On	Power supplied over Ethernet
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps
10/100/1000Base-T(X) Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps

Follow the steps below to log in and access the system:

1. Launch the Internet Explorer and type in IP address of the device. The default static IP address is **192.168.10.1**



2. Log in with default user name and password (both are **admin**).

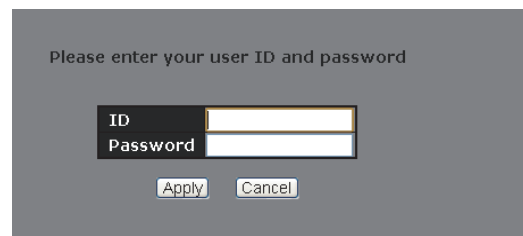

3. After logging in, you should see the following screen. For more information on configurations, please refer to the user manual. For information on operating the device using ORing's Open-Vision management utility, please go to ORing website.

Information Message	
<b>System</b>	TGPS-9168GT-M12
<b>Name</b>	EN50155 24-port managed Gigabit PoE Ethernet switch with 16x10/100/1000Base-T(X) P.S.E. ports and 8x10/100/1000Base-T(X)M12 connector
<b>Description</b>	
<b>Location</b>	
<b>Contact</b>	
<b>OID</b>	1.3.6.1.4.1.25972.100.6.5.300
<b>Hardware</b>	
<b>MAC Address</b>	00-1e-94-03-73-00
<b>Time</b>	
<b>System Date</b>	1970-01-01 00:00:21+00:00
<b>System Uptime</b>	0d 00:00:21
<b>Software</b>	
<b>Kernel Version</b>	v9.56
<b>Software Version</b>	v1.00
<b>Software Date</b>	2017-04-10T10:05:02+08:00
Auto-refresh <input type="checkbox"/> Refresh	
Enable Location Alert	

### Resetting

To restore the device configurations back to the factory defaults, press the **Reset** button for a few seconds. Once the power indicator starts to flash, release the button. The device will then reboot and return to factory defaults.

### Specifications

ORing Switch Model	TGPS-9168GT-M12
<b>Physical Ports</b>	
10/100/1000 Base-T(X) with P.S.E. Ports in M12 Auto MDI/MDIX	<b>16 x M12 connector (8 pin A-coding)</b>
10/100/1000Base-T(X) ports in M12 Auto MDI/MDIX	<b>8 x M12 connector (8-pin A-coding)</b>
<b>Technology</b>	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1d for STP (Spanning Tree Protocol) IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3af PoE specification
MAC Table	8K
Priority Queues	8
Processing	Store-and-Forward
Switch Properties	Switching latency: 7 us Switching bandwidth: 48 Gbps Max. Number of Available VLANs: 4095 IGMP multicast groups: 128 for each VLAN Port rate limiting: User Define
Jumbo frame	Up to 9.6K Bytes
Security Features	Device Binding security feature Enable/disable ports, MAC based port security Port based network access control (802.1x) VLAN (802.1Q) to segregate and secure network traffic Radius centralized password management SNMP v1/v2c/v3 encrypted authentication and access security Https / SSH enhance network security
Software Features	STP/RSTP/MSTP (IEEE 802.1D/w/s) Redundant Ring (O-Ring) with recovery time less than 10ms over 250units Support TTPD Protocol (Train Topology Discovery Protocol) to map the IP address automatically TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging and GVRP supported IGMP Snooping IP-based bandwidth management Application-based QoS management DOS/DDOS auto prevention Port configuration, status, statistics, monitoring, security DHCP Server / Client support SNTP, NTP for synchronizing of clocks over network SMTP Client Modbus TCP
Network Redundancy	O-Ring O-Chain MRP <b>Note</b> MSTP (RSTP/STP compatible)
RS-232 Serial Console Port	RS-232 in M12 (5-pin M12 A-coding) connector with console cable. 115200bps, 8, N, 1
<b>Fault Contact</b>	
Relay	Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin M12 A-coding)
<b>Power</b>	
Redundant Input Power	Dual DC inputs. 48VDC on 5-pin M23 connector
Power Consumption(Typ.)	21 Watts (power consumption of P.S.E. is not included)
PoE Output Power	240 Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present

Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	320(W) x 91.3(D) x 228(H) mm (12.6 x 3.59 x 8.98 inch.)
Weight (g)	3113 g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMC	EN 55022, EN 55024(CE EMC), EN 50121-4, EN 60945, FCC, EN 50121-3-2(EN50155), EN 61000-6-2, EN 61000-6-4, IEC 61000-3-2, IEC 61000-3-3
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
Railway	IEC 60571, IEC 62236-3-2
<b>Warranty</b>	5 years

\*Note: This function is available by request only