

Point-to-Point Fibre Converter RS-422/485

ODW-730-F1 EX

- Numerous fibre configuration options
 - Up to 120 km distance
 - BiDi support (single fibre)
 - Multimode and singlemode SFPs in single ring
- Designed for use in industrial applications
 - Dual 10 V to 60 VDC power input
 - 500,000h MTBF according to MIL HDBK-217K
 - ATEX Zone 2 – Ex II 3 G Ex nA IIC T4 Gc
- Unique solutions for serial RS-422/485 protocols
 - Data rates to 1.5 Mbit/s
 - Asynchronous and synchronous protocol support
 - Integral selectable failsafe and termination
- Simple to use and install
 - Dip switches to set data rate and delay
 - Comprehensive diagnostic LEDs
 - Compact housing with integral DIN rail clip



EN 61000-6-2
Industrial Immunity

EN 61000-6-3
Residential Emission

EN 61000-6-4
Industrial Emission

EN 50121-4
Railway Trackside

The ODW-730-F1 has been designed to allow RS-422/485 protocols to be transmitted point-to-point over a fibre optic link. The design allows the use of a range of Westermo verified SFP (Small Form Pluggable) transceivers which can provide solutions with, for example, only a single fibre or distances up to 120 km.

This unit has been designed for industrial use where the requirement is for a long and reliable service life, in a harsh environment. To ensure this reliable operation we manufacture using the highest quality components.

The ODW-730 draws on Westermo's many years of knowledge of serial protocols and can be used on both synchronous and asynchronous data streams. The switch selectable termination circuit saves the need for external terminating resistors.


The ODW is simple to install, being small, with a simple integral DIN rail clip. The unit is totally transparent to any data rate so no configuration is needed. The comprehensive LEDs provide a quick and easy way of detecting any network problems that may be encountered.

Ordering Information

Art.no	Description
3651-3731	ODW-730-F1 EX
3125-0001	PS-30, Power supply, DIN mounted (Accessories)

Specifications ODW-730-F1 EX

Dimensional drawing

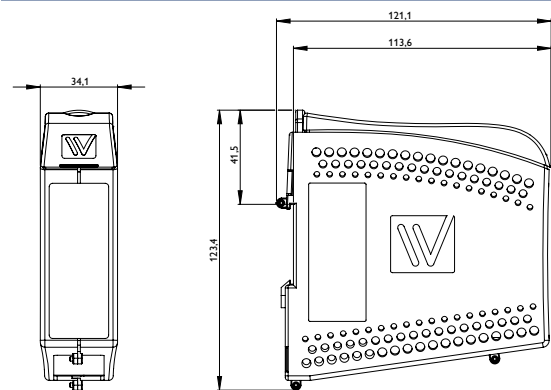

Dimension W x H x D	35 x 121 x 119 mm (1.37 x 4.76 x 4.68 in)
Weight	0.26 kg
Degree of protection	IP 21

Power	
Operating voltage	10 to 60 VDC and 20 to 30 VAC
Rated current	300 mA @ 12 V 150 mA @ 24 V 75 mA @ 48 V

Interfaces	
Status	1 x Detachable screw terminal
RS-422/485	1 x 300 bit/s – 1.5 Mbit/s
FX (Fibre)	1 x LC Duplex or LC Simplex

Temperature	
Operating	–40 to +70°C (–40 to +158°F)
Storage & Transport	–40 to +70°C (–40 to +158°F)

Agency approvals and standards compliance	
EMC	EN 61000-6-1, Immunity residential environments
	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-3, Emission residential environments
	EN 61000-6-4, Emission industrial environments
	EN 55022, Emission IT equipment, class A
	EN 55024, Immunity IT equipment
	FCC part 15 Class A
	EN 50121-4, Railway signalling and telecommunications apparatus
ATEX	IEC 62236-4, Railway signalling and telecommunications apparatus
	EN 60079-0 and EN 60079-15