


Anritsu envision : ensure



ShockLine™ Economy Vector Network Analyzers

MS46322B

1 MHz to 43.5 GHz

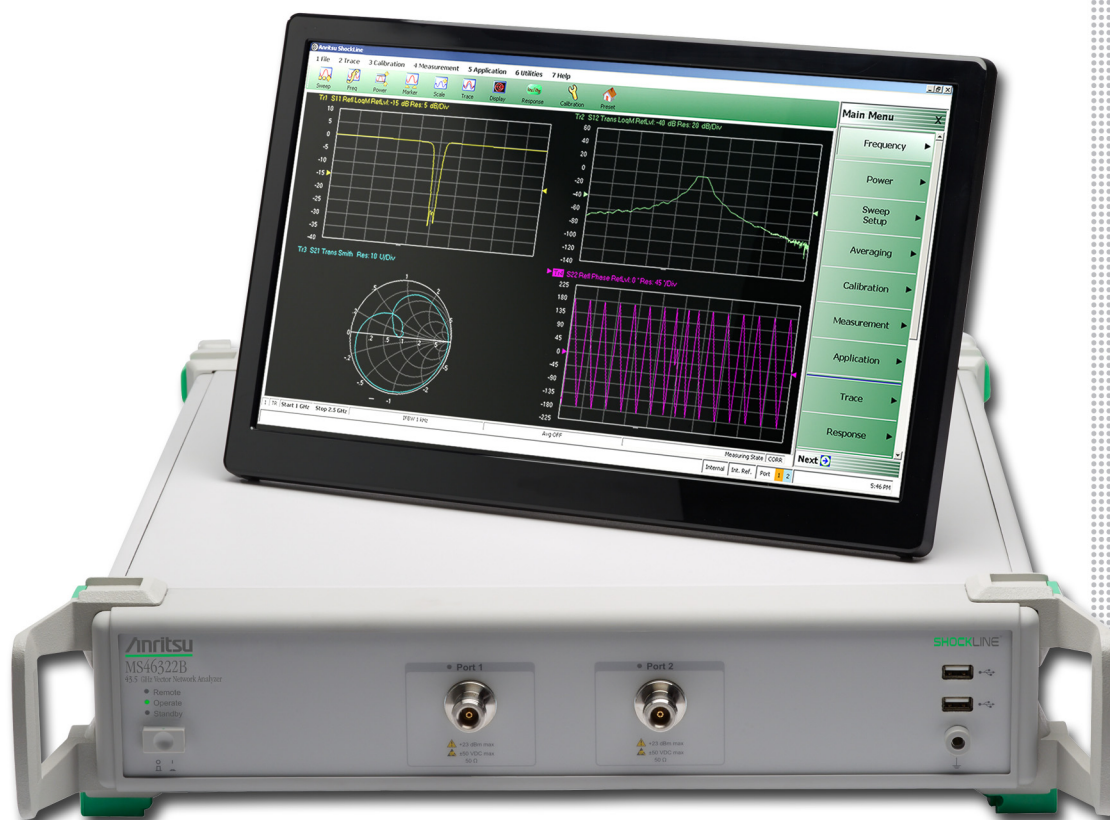

Introduction

The MS46322B is part of the ShockLine™ family of Vector Network Analyzers from Anritsu. It is a low-cost series of 2U high, 2-port Economy Vector Network Analyzers. It is available in three frequency ranges: 1 MHz to 8/20/43.5 GHz, and is capable of s-parameter and time domain measurements.

The MS46322B is based on patented shockline VNA-on-chip technology, which simplifies the internal VNA architecture at high frequencies, reduces instrument cost, and enhances accuracy and measurement repeatability. The combination of low cost and good performance make ShockLine™ VNAs ideal candidates for testing RF and Microwave passive devices to 43.5 GHz.

The MS46322B series supports SCPI command programming and has software driver support for the most common programming environments. The MS46322B use industry standard LAN communications for robust remote control in test applications. ShockLine™ VNAs provide a powerful graphical user interface for manual testing of devices. The full-featured user interface is enabled by attaching a (user-supplied) touchscreen monitor, keyboard, and mouse.

This document provides detailed specifications for the MS46322B series Vector Network Analyzers (VNAs) and related options.

Instrument Models and Operating Frequencies

Base Model

- MS46322B, 2-Port ShockLine VNA

Requires one Frequency Option

- MS46322B-010, 1 MHz to 8 GHz, 2-port
- MS46322B-020, 1 MHz to 20 GHz, 2-Port
- MS46322B-040, 1 MHz to 43.5 GHz, 2-Port

Principal Options

- MS46322B-002, Time Domain



MS46322B-040 2-Port ShockLine Economy VNA

Table of Contents

Definitions 3

System Dynamic Range 4

Receiver Compression Levels 4

High Level Noise 4

Output Power Settings 4

Measurement Stability 4

Frequency Resolution, Accuracy, and Stability 4

Uncorrected (Raw) Port Characteristics 4

MS46322B-010 VNA System Performance with Manual Cal Kits 5

MS46322B-020 VNA System Performance with Manual Cal Kits 6

MS46322B-040 VNA System Performance with Manual Cal Kits 7

MS46322B-010 VNA System Performance with SmartCal™ 8

MS46322B-020 VNA System Performance with SmartCal™ 9

MS46322B-040 VNA System Performance with Precision AutoCal™ 10

Measurement Throughput Summary 11

Standard Capabilities 11

Calibration and Correction Capabilities 13

Optional Capabilities 13

Remote Operability 13

Front Panel Connections 14

Rear Panel Connections 14

CPU, Memory, and Security Features 15

Mechanical 15

Regulatory Compliance 15

Environmental 15

Warranty 15

Ordering Information 16

Definitions

	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Warm-Up Time	After 30 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Over the 25 °C ± 5 °C temperature range.
Error-Corrected Specifications	Specifications are valid over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature. Error-corrected specifications are warranted and include guard-bands, unless otherwise stated.
Frequency Bands in Tables	When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band.
User Cables	Specifications do not include effects of any user cables attached to the instrument.
Discrete Spurious Responses	Specifications may exclude discrete spurious responses.
Internal Reference Signal	All specifications apply with internal 10 MHz Crystal Oscillator Reference Signal.
Interpolation Mode	All specifications are with Interpolation Mode Off.
Standard	Refers to instruments without Options.
Typical Performance	Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty. Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical. The MS46322B is operational to 43.5 GHz. All specifications above 40 GHz are typical.
Characteristic Performance	Characteristic performance indicates a performance designed-in and verified during the design phase. It does include guard-bands and is not covered by the product warranty.
Recommended Calibration Cycle	12 months (Residual specifications also require calibration kit calibration cycle adherence.)

System Dynamic Range

System dynamic range is calculated as the difference between High source power and the noise floor (RMS) at the specified reference plane at 10 Hz IF Bandwidth with an isolation calibration.

Frequency Range	Standard (dB)	Typical (dB)
1 MHz to 10 MHz	85	105
> 10 MHz to 8 GHz ^a	100	115
> 8 GHz to 43.5 GHz ^b	100	110

a. Crosstalk may reduce dynamic range up to 20 dB (typical) at lower IF bandwidths (≤ 10 kHz) when measuring highly reflective DUT's from 4 GHz to 8 GHz. Reflection measurements are not affected.

b. Decrease specification by 5 dB between 8 GHz and 14 GHz.

Receiver Compression Levels

Performance is typical.

Frequency Range	Standard (dBm)
1 MHz to 43.5 GHz	+5 dBm

High Level Noise

Measured at 100 Hz IF bandwidth and at High power level, RMS. Performance is characteristic.

Frequency	Magnitude (dB)	Phase (deg)
1 MHz to < 20 MHz	0.03 (0.005, typical)	< 0.2 (< 0.035 typical)
20 MHz to 43.5 GHz	0.006 (0.001, typical)	< 0.1 (< 0.05 typical) ^a

a. Above 20 GHz, High Level Noise (phase only) is increased by a factor of 1.5.

Output Power Settings

Typical

Power Setting	Standard
High (default)	1 MHz to 8 GHz > 8 GHz to 43.5 GHz 5 dBm -3 dBm
Low	1 MHz to 43.5 GHz -20 dBm

Measurement Stability

Ratio measurement, with ports shorted. Typical.

Frequency	Magnitude (dB/°C)	Phase (deg/°C)
10 MHz to 43.5 GHz	0.02	0.3

Frequency Resolution, Accuracy, and Stability

Resolution	Accuracy	Stability	Aging
1 Hz	± 1.0 ppm (at time of calibration)	± 1.0 ppm from -10 °C to +55 °C, typical	± 1.0 ppm/yr, typical

Uncorrected (Raw) Port Characteristics

User and System Correction Off. All specifications typical.

Frequency Range	Directivity (dB)	Port Match(dB)
1 MHz to 43.5 GHz	> 8 dB	> 8 dB

MS46322B-010 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With 12-term SOLT Calibration using TOSLN50A-8 or TOSLNF50A-8 N type connector calibration kits.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
1 MHz to 6 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 6 GHz to 8 GHz	≥ 37	≥ 33	≥ 37	±0.15	±0.06

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

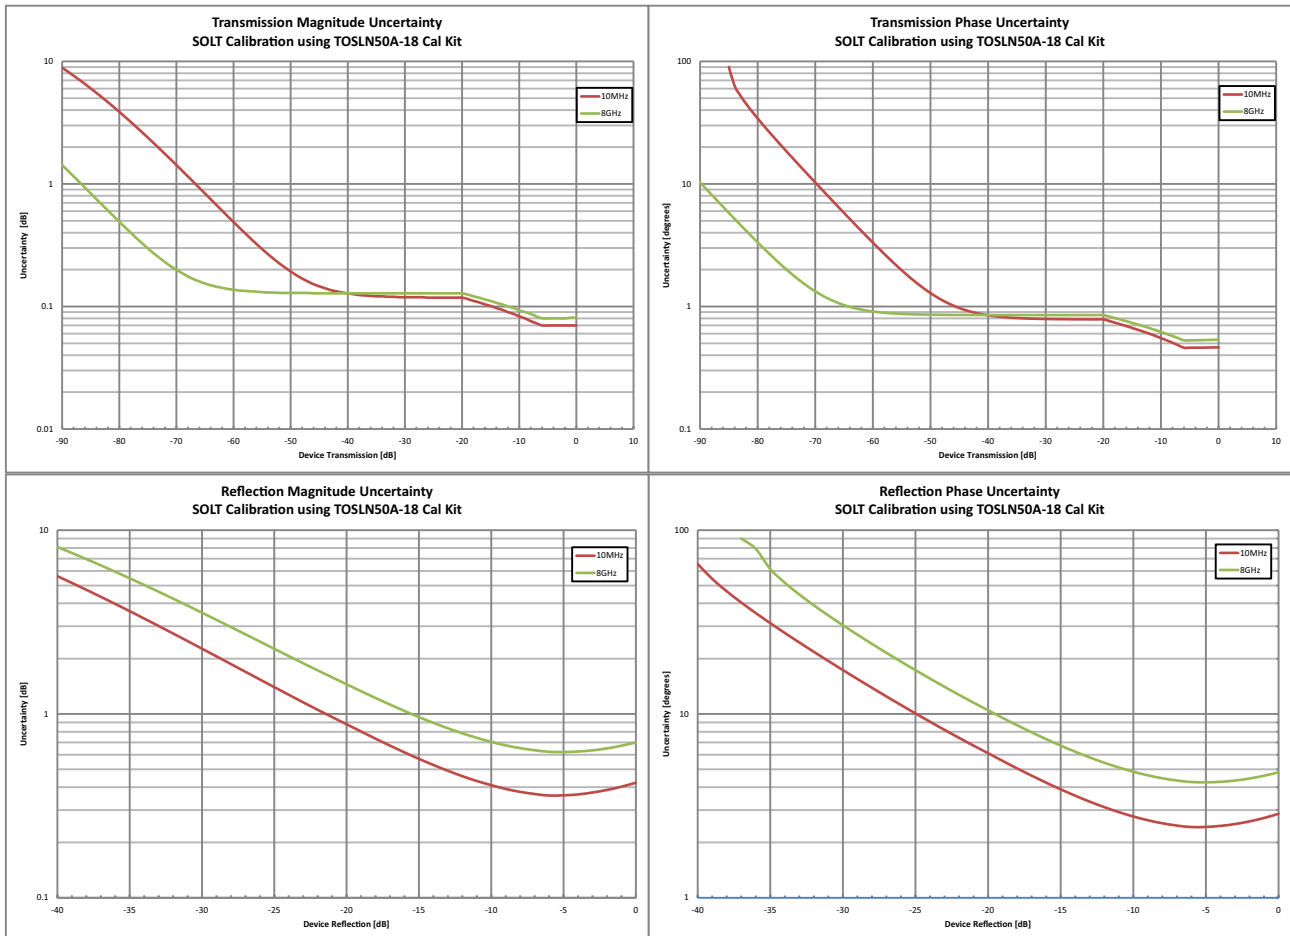

MS46322B-020 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With 12-term SOLT calibration using the TOSLK50A-20 or TOSLKF50A-20 K type connector calibration kits.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
1 MHz to 10 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 10 GHz to 20 GHz	≥ 36	≥ 26	≥ 36	±0.15	±0.05

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

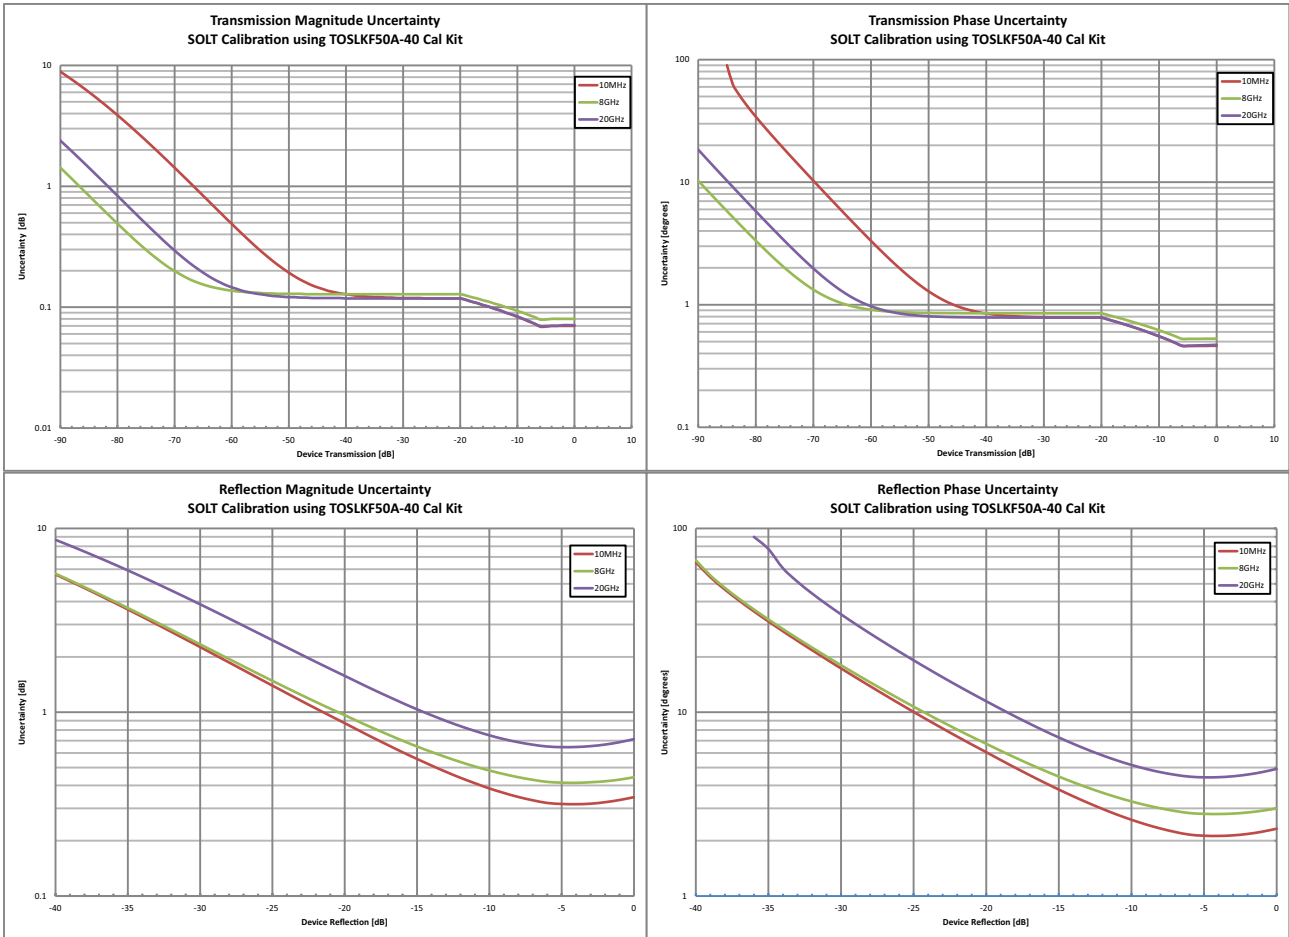

MS46322B-040 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With 12-term SOLT Calibration using TOSLK50A-40 or TOSLKF50A-40 K type connector calibration kits.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
1 MHz to 10 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 10 GHz to 20 GHz	≥ 36	≥ 26	≥ 36	±0.15	±0.05
> 20 GHz to 30 GHz	≥ 32	≥ 22	≥ 32	±0.10	±0.05
> 30 GHz to 43.5 GHz	≥ 30	≥ 20	≥ 30	±0.10	±0.05

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

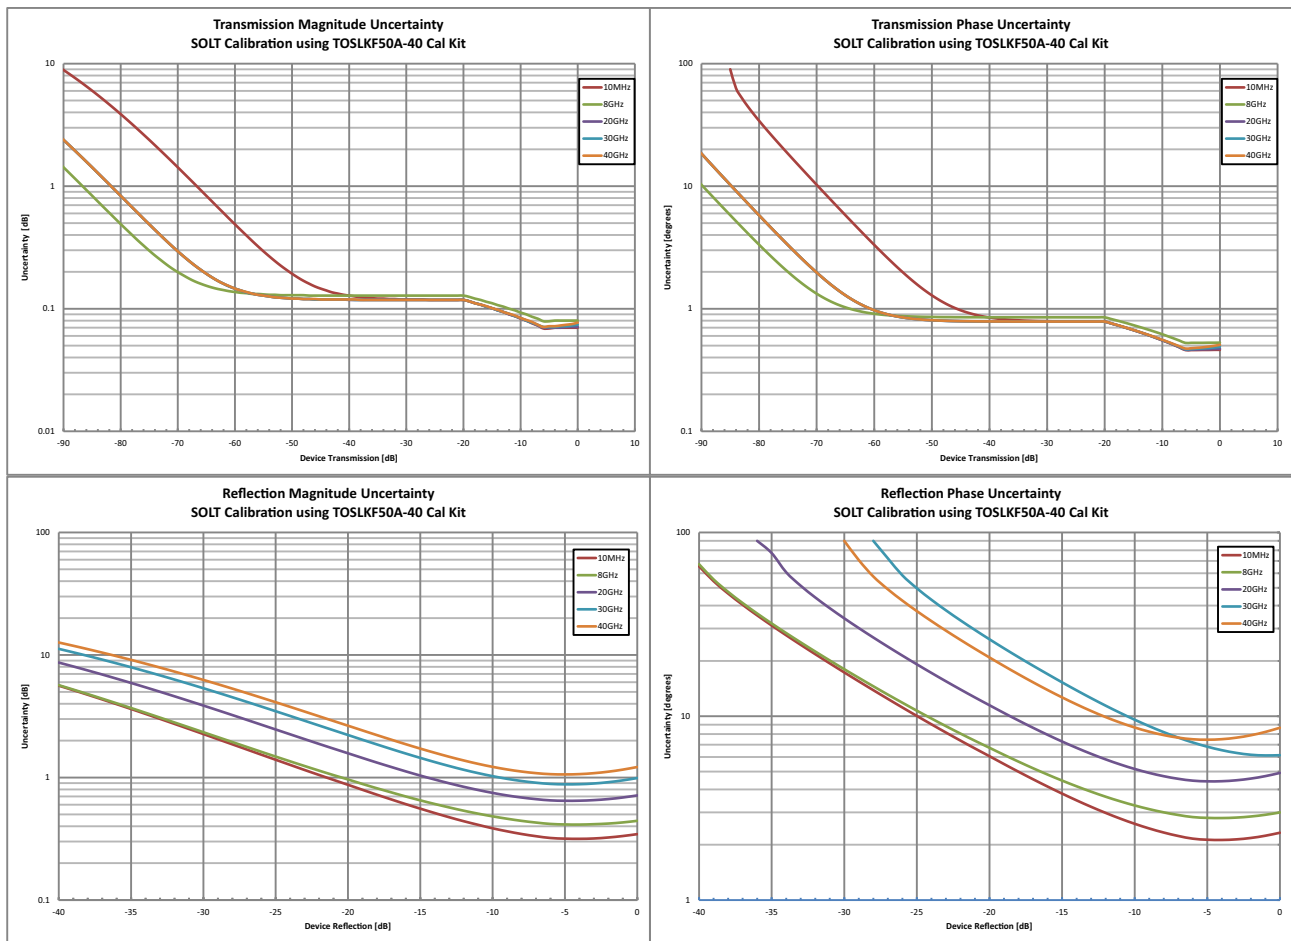

MS46322B-010 VNA System Performance with SmartCal™

Error-Corrected Specifications

With 12-term calibration using the MN25208A SmartCal™ automatic calibration kit with connector options MN25208A-001, -002, -003, and -004.^a


Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^b (dB)	Reflection Tracking ^b (dB)	Transmission Tracking ^b (dB)
1 MHz to < 3 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
3 GHz to 6 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.08
> 6 GHz to 8 GHz	≥ 37	≥ 33	≥ 37	±0.15	±0.08

a. MN25208A-004: All specifications are typical.

b. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

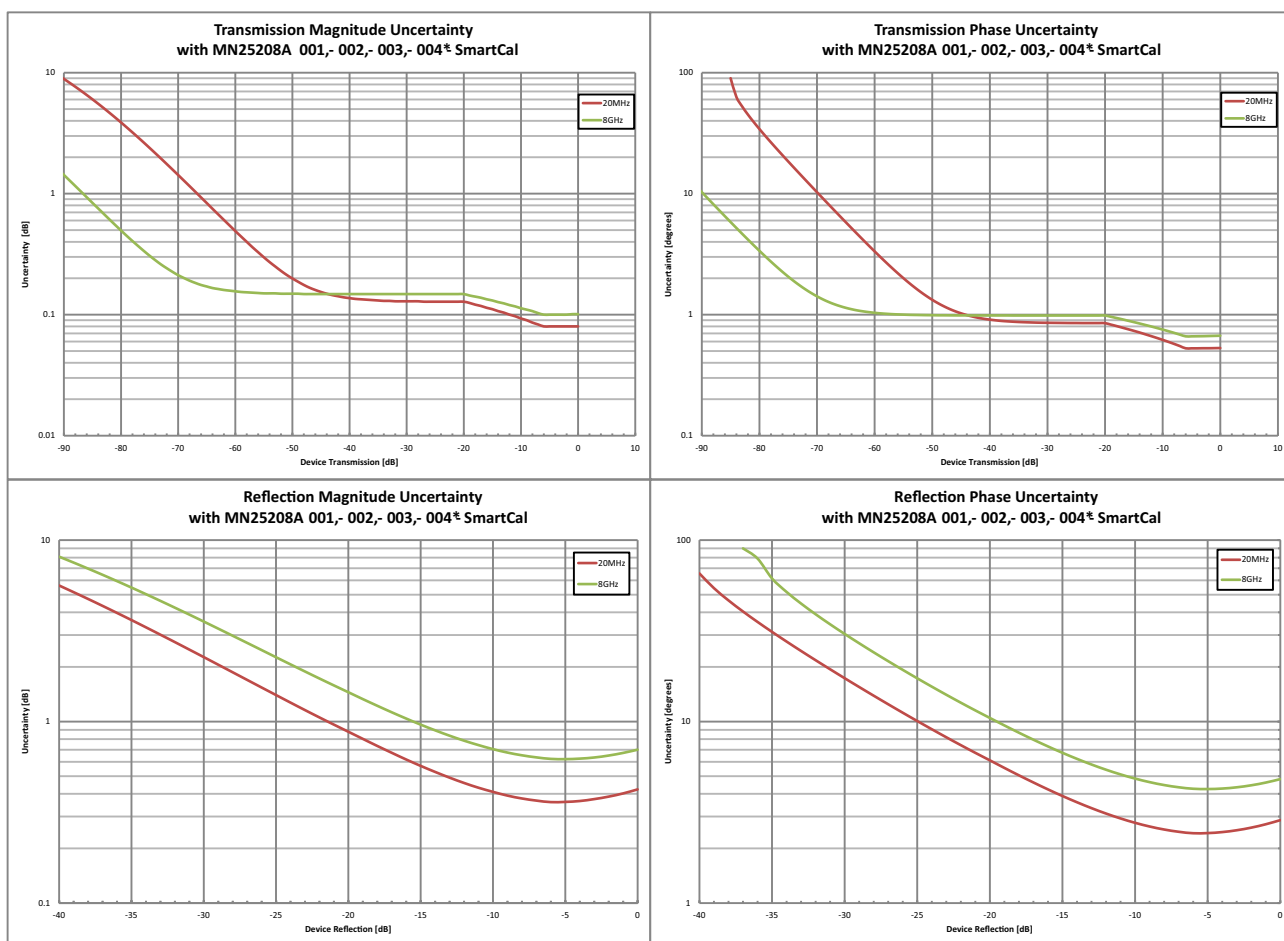

* Specifications are not warranted. All values are typical.

MS46322B-020 VNA System Performance with SmartCal™

Error-Corrected Specifications


With 12-term calibration using the MN25218A SmartCal™ automatic calibration kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
1 MHz to < 10 MHz	≥ 42	≥ 33	≥ 42	±0.20	±0.20
10 MHz to 6 GHz	≥ 42	≥ 33	≥ 42	±0.15	±0.06
> 6 GHz to 18 GHz	≥ 37	≥ 33	≥ 37	±0.15	±0.10
> 18 GHz to 20 GHz	≥ 37	≥ 33	≥ 37	±0.20	±0.15

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

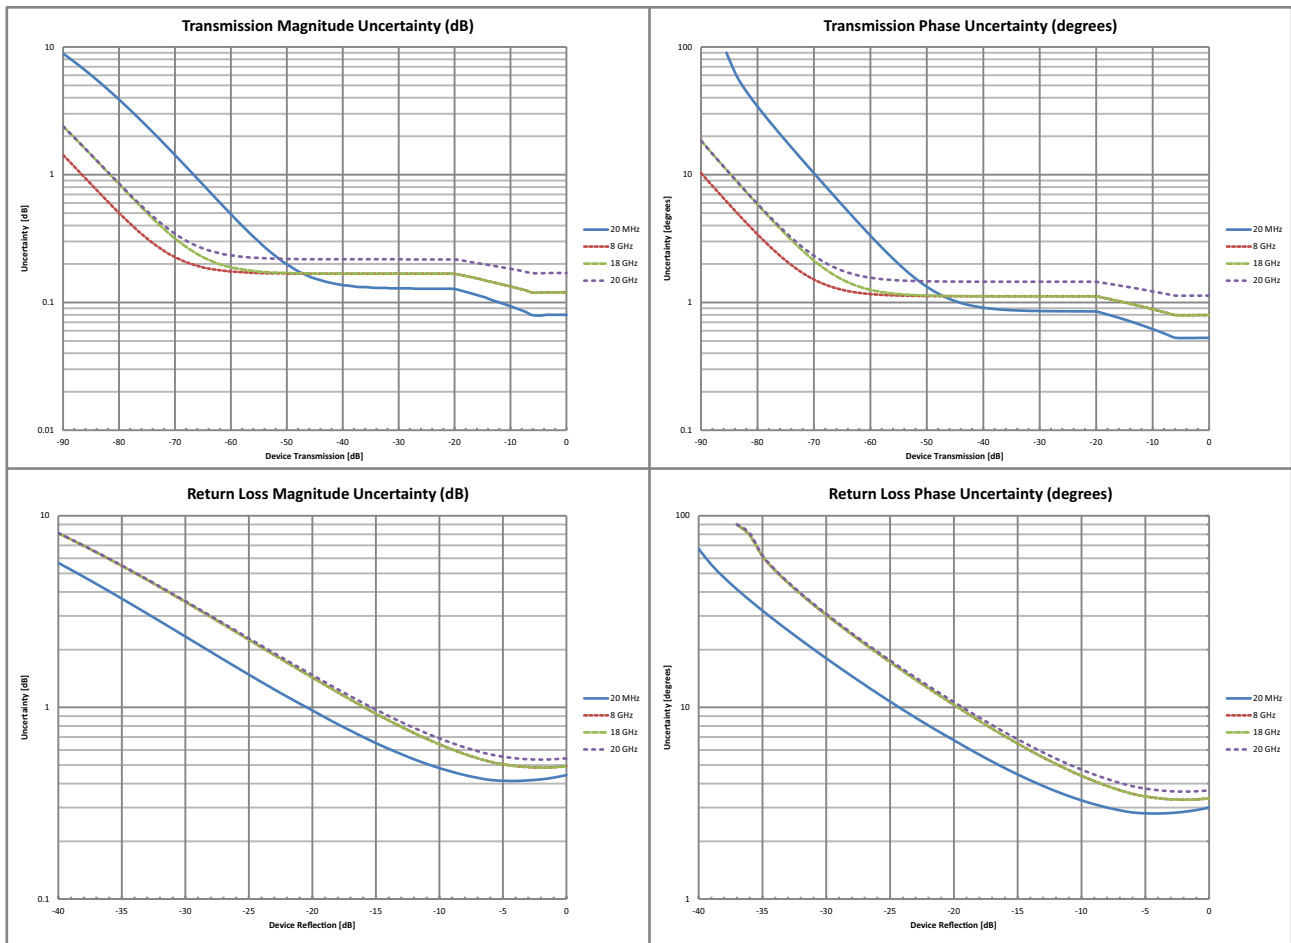

MS46322B-040 VNA System Performance with Precision AutoCal™

Error-Corrected Specifications


With 12-term calibration using the 36585K automatic calibrator (AutoCal). Performance is typical.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
1 MHz to < 10 GHz	≥ 50	≥ 49	≥ 42	±0.15	±0.06
10 GHz to < 20 GHz	≥ 45	≥ 49	≥ 36	±0.15	±0.05
20 GHz to < 30 GHz	≥ 45	≥ 45	≥ 36	±0.10	±0.05
30 GHz to 40 GHz	≥ 45	≥ 45	≥ 30	±0.10	±0.05

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

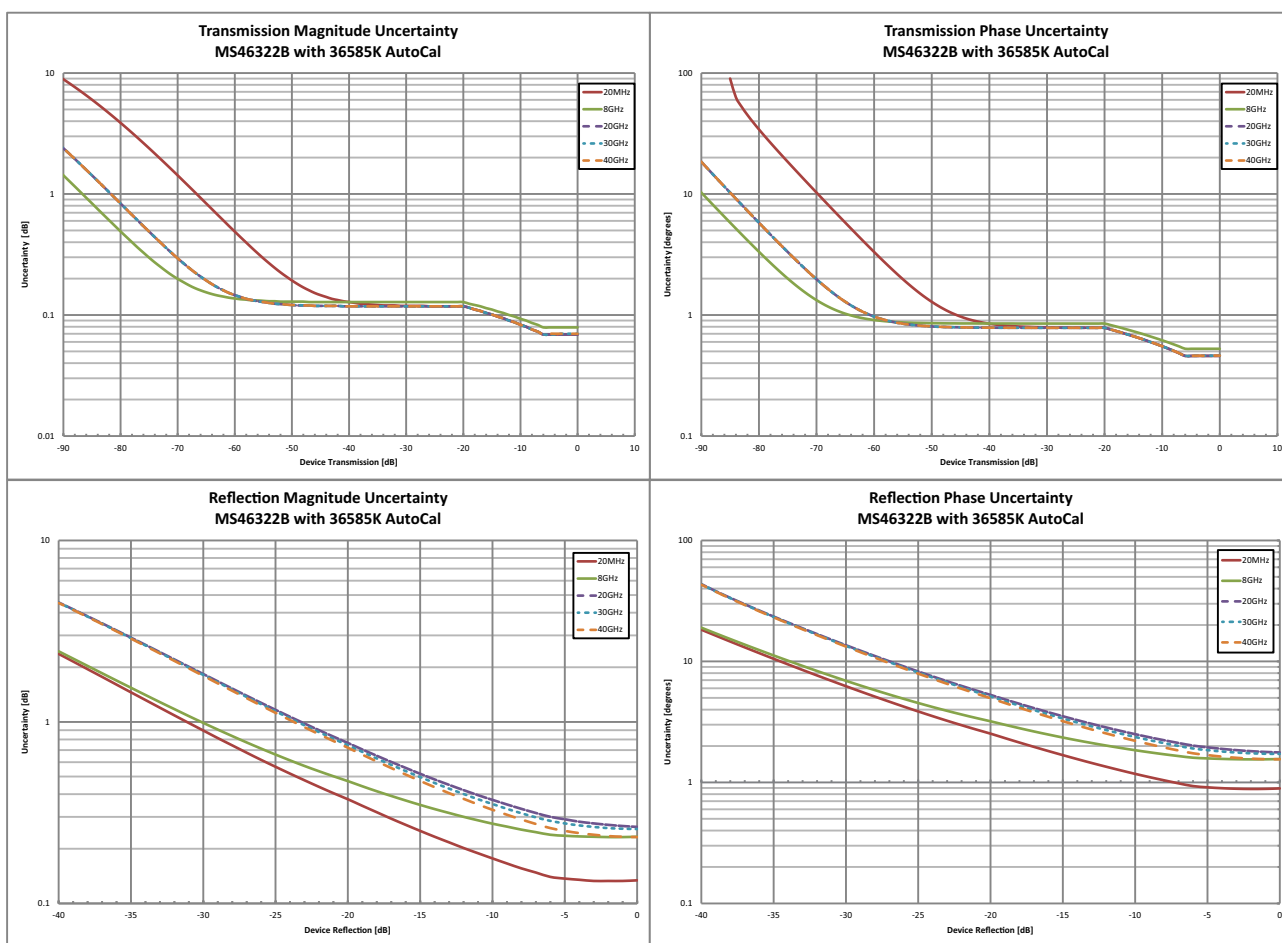

Measurement Throughput Summary

Measurement Speed	130 μ s/point, typical. Per point single sweep time, including placing measurement data into memory. Average of narrow, mid, and wide frequency span sweeps. 300 kHz IFBW, 1601 points, 2 port calibrated data measurement.				
Data Transfer Time (ms)	Transferred complex S11 data, using "CALC:DATA:SDATA?" command. Typical performance data. ^a				
	Number of Points	51	201	401	1601
SCPI over LAN					
REAL 64		4	4	4	8
REAL 32		4	4	4	8
ASCII		14	34	60	209

a. Data transfer time varies depending on the PC and control software used with the VNA.

Standard Capabilities

Operating Frequencies		
MS46322B-010		1 MHz to 8 GHz
MS46322B-020		1 MHz to 20 GHz
MS46322B-040		1 MHz to 43.5 GHz
Measurement Parameters		
2-Port Measurements		$S_{11}, S_{21}, S_{22}, S_{12}$, and any user-defined combination of $a_1, a_2, b_1, b_2, 1$ Maximum Efficiency Analysis, Mixed-mode SDD, SDC, SCD, SCC
Domains		Frequency Domain, Time (Distance) Domain (Option 2)
Sweeps		
Frequency Sweep Types		Linear, Log, or Segmented
Display Graphs		
Single Rectilinear Graph Types		Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, Impedance, KQ and η Max
Dual Rectilinear Graph Types		Log Mag and Phase, Linear Mag and Phase, Real and Imaginary, KQ and η Max
Circular Graph Types		Smith Chart (Impedance), Polar
Measurements Data Points		
Maximum Data Points		2 to 16,001 points
Limit Lines		
Limit Lines		Single or segmented. 2 limit lines per trace. 50 segments per trace.
Single Limit Readouts		Uses interpolation to determine the intersection frequency.
Test Limits		Both single and segmented limits can be used for PASS/FAIL testing.
Ripple Limit Lines		
Limit Lines		Single or segmented. 2 limit lines per trace. 50 segments per trace.
Ripple Value		Absolute Value or Margin
Test Limits		Both single and segmented limits can be used for PASS/FAIL testing.
Averaging		
Point-by-Point		Point-by-point (default), maximum number of averages = 200
Sweep-by-Sweep		Sweep-by-sweep, maximum number of averages = 4096
IF Bandwidth		
		10, 20, 50, 70, 100, 200, 300, 500, 700 Hz 1, 2, 3, 5, 7, 10, 20, 30, 50, 70, 100, 200, 300 kHz
Reference Plane		
Line Length or Time Delay		The reference planes of a calibration or other normalization can be changed by entering a line length or time delay.
Dielectric Constants		Dielectric constants may be entered for different media so the length entry can be physically meaningful.
Dispersion Modeling		Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities.
Attenuations		Attenuations and constant phase offsets can be entered to better describe any reference plane distortions.
De-embedding		For more complete reference plane manipulation, the full de-embedding system can also be used.

Measurement Frequency Range		
Frequency Range Change		Frequency range of the measurement can be narrowed within the calibration range without recalibration.
CW Mode		CW mode permits single frequency measurements also without recalibration.
Interpolation Not Activated		If interpolation is not activated, the subset frequency range is forced to use calibration frequency points.
Interpolation Activated		If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error.
Group Delay		
Group Delay Aperture		Defined as the frequency span over which the phase change is computed at a given frequency point.
Aperture		The aperture can be changed without recalibration.
Minimum Aperture		The minimum aperture is the frequency range divided by the number of points in calibration and can be increased to 20 % of the frequency range.
Group Delay Range		< 180° of phase change within the aperture
Channels, Display, and Traces		
Channels and Traces		16 channels, each with up to 16 traces
Display Colors		Unlimited colors for data traces, memory, text, markers, graticules, and limit lines
Trace Memory and Math		A separate memory for each trace can be used to store measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled.
Intra-trace Math		Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace.
Scale Resolution		
Log Magnitude		0.001 dB
Linear Magnitude		10 μ U
Phase		0.01°
Group Delay		0.1 ps
Time		0.0001 ps
Distance		0.1 μ m
SWR		10 μ U
Power		0.01 dB
Markers		
Markers		12 markers + 1 reference marker
Marker Coupling		Coupled or decoupled
Marker Overlay		Display markers on active trace only or on all traces when multiple trace responses are present on the same trace
Marker Data		Data displayed in graph area or in table form
Reference Marker		Additional marker per trace for reference
Marker Statistics		Mean, maximum, minimum, standard deviation
Marker Search and Tracking		Per trace or over a marker region
		Search and/or track for minimum, maximum, peak, or target value
Other		
Filter Parameters		Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors.
S-Parameter Conversion		Z Reflection Impedance Z Transmission Impedance Y Reflection Admittance Y Transmission Admittance 1/S

Calibration and Correction Capabilities

Calibration Methods	Short-Open-Load-Through (SOLT) Offset-Short-Offset-Short-Load-Through (SSLT) Triple-Offset-Short-Through (SSST) Short-Open-Load-Reciprocal (SOLR) Line-Reflect-Line (LRL) / Line-Reflect-Match (LRM) SmartCal™ AutoCal Thru Update available
Correction Models	2-Port (Forward, Reverse, or both directions) 1-Port (S_{11} , S_{22} , or both) Transmission Frequency Response (Forward, Reverse, or both directions) Reflection Frequency Response (S_{11} , S_{22} , or both)
Coefficients for Calibration Standards	Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files. Enter coefficients into user-defined locations. Use complex load models.
Interpolation	Allows interpolation between calibration frequency points.
Adapter Removal Calibration	Characterizes and “removes” an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices.
Dispersion Compensation	Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip
Embedding/De-embedding	The MS46322B is equipped with an Embedding/De-embedding system. De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements. Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement. Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily. An extraction utility is part of this package that allows easier computation of de-embedding files based on additional calibration steps and measurements.
Optical/Electrical Conversion	O/E & E/O O/E and E/O setup wizard is provided
Impedance Conversion	Allows entry of different reference impedances (complex values) for different ports

Optional Capabilities

Time Domain Measurements, Option 2	Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate.
------------------------------------	---

Remote Operability

ShockLine supports several remote operability options.

Communication Type	Data Format	Performance	Description
Via LAN	Using VXI-11 Protocol	Gigabit Data Transfer Speed	Use SCPI commands
Drivers for LAN	IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python programming environments.		
Triggering	Start Trigger	Software and Digital Edge	
	Input Range	+3.3 V logic level (+5 V tolerant)	
	Minimum Trigger Width	50 ns	
	Trigger Delay	6 μs, typical	

Front Panel Connections



MS46322B Front Panel

Test Ports 1 and 2

MS46322B-010	N(f)
MS46322B-020	Ruggedized K(m)
MS46322B-040	Ruggedized K(m)
Damage Input Levels	+23 dBm maximum, ±50 VDC maximum

USB Ports

Two type A USB 2.0 Ports for peripherals such as keyboard, mouse, flash drive, hardware key, and similar devices.

Chassis Grounding Port

Banana(f)

Rear Panel Connections



MS46322B Series Rear Panel

AC Power Input

AC Input connector, with On/Off switch, and fuses 350 VA maximum, 90 to 264 VAC, 47 to 63 Hz (power factor controlled)

USB and LAN

USB Ports	Four type A USB 3.0 for peripherals such as keyboard, mouse, memory stick, USB monitor, and hardware key.
LAN Port	Gigabit Ethernet

Media

HDMI Port	Video output, touchscreen compatible
Audio	External stereo speaker and microphone (3.5 mm)
HDD	Standard removable hard disc drive

10 MHz In

Connector Type	BNC(f)
Signal	+0 dBm, typical; 50 Ω, nominal

10 MHz Out

Connector Type	BNC(f)
Signal	+8 dBm, typical; 50 Ω, nominal

External Trigger Input

Connector Type	BNC(f)
Voltage Input	0 to 3.3 V input (5 V tolerant)
Impedance	High impedance (> 100 kΩ)
Pulse Width	50 ns minimum input pulse width
Trigger Delay	6 μs typical

CPU, Memory, and Security Features

CPU	Intel Core™ i5
Storage	Serial-ATA (SATA) Solid State Drive (> 30 GB SSD, removable) for OS, Programs, and Data

Security Features

Virus Protection, Best Practices	If the VNA is attached to a network, best practices recommend installing anti-virus software.
Display Blanking	ShockLine™ software can obscure frequency on the system display for security.
Removable Internal Drive	Rear Panel accessible Solid State Drive (SSD) is quickly removable and easy to secure.
2000-1857-R Spare SSD	A bootable SSD module is available as a spare for MS46322B units used in multiple or compartmentalized locations. The operating system and software are pre-installed on each 2000-1857-R SSD.

Mechanical

Dimensions	Dimensions listed are for the instrument body without rack mount option attached.
H x W x D	108 mm x 484 mm x 590 mm

Weight	< 11 kg (< 25 lb), typical weight for a fully-loaded MS46322B VNA
---------------	---

Regulatory Compliance

European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55022, IEC/EN 61000-4-2/3/4/5/6/58/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010, IEC 60950-1 (when used with Anritsu Company supplied Power Supply) RoHS Directive 2011/65/EU
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	KCC-REM-A21-0004

Environmental

	MIL-PRF-28800F Class 3
Operating Temperature Range	0 °C to 50 °C
Storage Temperature Range	-40 °C to 75 °C
Maximum Relative Humidity	95 % RH at 40 °C, non-condensing
Vibration, Sinusoidal	5 Hz to 55 Hz
Vibration, Random	10 Hz to 500 Hz
Half Sine Shock	30 g _n
Altitude	4600 meters, operating and non-operating

Warranty

Instrument and Built-In Options	3 years from the date of shipment (standard warranty)
Calibration Kits	Typically 1 year from the date of shipment
Test Port Cables	Typically 1 year from the date of shipment
Warranty Options	Additional warranty available

Ordering Information

Instrument Models		
	MS46322B	2-Port ShockLine™ Economy VNA (base model)
Requires One Frequency Option		
	MS46322B-010	1 MHz to 8 GHz, type N(f) ports
	MS46322B-020	1 MHz to 20 GHz, type Ruggedized K(m) ports (compatible with 3.5 mm and SMA connectors)
	MS46322B-040	1 MHz to 43.5 GHz, type Ruggedized K(m) ports (compatible with 3.5 mm and SMA connectors)
Included Accessories		
		Each VNA comes with a power cord and instructions on where to download software and related literature.
Main VNA Options		
	MS46322B-001	Rack Mount, adds handles and removes feet for shelf-mounting into a 19 inch universal rack
	MS46322B-002	Time Domain with Time Gating
Calibration Options		
	MS46322B-098	Standard Calibration, ISO 17025 compliant, without data
	MS46322B-099	Premium Calibration, ISO 17025 compliant, with data
Precision Automatic Calibrator Modules		
	MN25208A	2-port USB SmartCal Module, 300 kHz to 8.5 GHz (available with various connector options)
	MN25218A	2-port USB SmartCal Module, 300 kHz to 20 GHz, (available with K(f) connector option)
	MN4765B-0070	2-port, 1480 nm to 1620 nm, O/E Calibration Module, 70 kHz to 70 GHz
	MN4765B-0071	2-port, 1300 nm to 1330 nm, O/E Calibration Module, 70 kHz to 70 GHz
	MN4765B-0072	2-port, dual 1530 nm to 1620 nm and 1300 nm to 1330 nm, O/E Calibration Module, 70 kHz to 70 GHz
	36585K-2M	K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(m)
	36585K-2F	K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(f) to K(f)
	36585K-2MF	K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(f)
	2000-1809-R	Serial to USB Adapter (required for use with 36585 AutoCal module)
Mechanical Calibration Kits		
	3650A	SMA/3.5 mm Calibration Kit, Without Sliding Loads, DC to 26.5 GHz, 50 Ω
	3650A-1	SMA/3.5 mm Calibration Kit, With Sliding Loads, DC to 26.5 GHz, 50 Ω
	3652A	K Connector Calibration Kit, Without Sliding Loads, DC to 40 GHz, 50 Ω
	3652A-1	K Connector Calibration Kit, With Sliding Loads, DC to 40 GHz, 50 Ω
	3653A	N Connector Calibration Kit, Without Sliding Loads, DC to 18 GHz, 50 Ω
	OSLN50A-8	Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
	OSLNF50A-8	Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
	TOSLN50A-8	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
	TOSLNF50A-8	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω
	OSLN50A-18	Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
	OSLNF50A-18	Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
	TOSLN50A-18	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
	TOSLNF50A-18	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω
	TOSLK50A-20	Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω
	TOSLKF50A-20	Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω
	TOSLK50A-40	Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω
	TOSLKF50A-40	Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω
Removable SSD Kit		
	2000-1857-R	Spare SSD Disk Drive Kit

RF Cables and Adapters

N120-6	RF Cables, Semi-Rigid, N(m) to N(m), 1 each, 0.01 to 18 GHz, 50 Ω, 15 cm (5.9 in)
NS120MF-6	RF Cables, Semi-Rigid, N(f) to N(f), 1 each, 0.01 to 18 GHz, 50 Ω, 15 cm (5.9 in)
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
71693-R	Ruggedized adapter, K(f) to N(f), DC to 18 GHz, 50 Ω
34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFN50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω
34NK50	Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω
34NKF50	Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω
34NFK50	Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω
34NFK50	Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω
K220B	Precision Adapter, DC to 40 GHz, K(m) to K(m), 50 Ω
K222B	Precision Adapter, DC to 40 GHz, K(f) to K(f), 50 Ω
K224B	Precision Adapter, DC to 40 GHz, K(m) to K(f), 50 Ω

Test Port Cables, Flexible, Ruggedized, Phase Stable

14RKFK50-0.6	0.6 m (24"), DC to 40 GHz, Ruggedized K(f) to K(f), 50 Ω
14RKFK50-1.0	1.0 m (39"), DC to 40 GHz, Ruggedized K(f) to K(f), 50 Ω
14RKFK50-0.6	0.6 m (24"), DC to 40 GHz, Ruggedized K(f) to K(m), 50 Ω
14RKFK50-1.0	1.0 m (39"), DC to 40 GHz, Ruggedized K(f) to K(m), 50 Ω
14KFK50-0.6	0.6 m (24"), DC to 40 GHz, K(f) to K(f), 50 Ω
14KFK50-1.0	1.0 m (39"), DC to 40 GHz, K(f) to K(f), 50 Ω
14KFK50-0.6	0.6 m (24"), DC to 40 GHz, K(f) to K(m), 50 Ω
14KFK50-1.0	1.0 m (39"), DC to 40 GHz, K(f) to K(m), 50 Ω
15NNF50-1.0B	1.0 m (39"), DC to 18 GHz, Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 50 Ω
15NNF50-1.5B	1.5 m (59"), DC to 18 GHz, Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 50 Ω
15NN50-1.0B	1.0 m (39"), DC to 18 GHz, Test Port Cable, Flexible, Phase Stable, N(m) to N(m), 50 Ω
15LL50-1.0A	1.0 m (39"), DC to 20 GHz, Test Port Cable, Armored, Phase Stable, 3.5 mm(m) to 3.5 mm(m), 50 Ω
15LLF50-1.0A	1.0 m (39"), DC to 20 GHz, Test Port Cable, Armored, Phase Stable, 3.5 mm(m) to 3.5 mm(f), 50 Ω
15KK50-1.0A	1.0 m (39"), DC to 20 GHz, Test Port Cable, Armored, Phase Stable, K(m) to K(m), 50 Ω
15KKF50-1.0A	1.0 m (39"), DC to 20 GHz, Test Port Cable, Armored, Phase Stable, K(m) to K(f), 50 Ω
SC8267	1.0 m (36"), Cable, 40 GHz, K(m) to K(f), 50 Ω

Phase-Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)

3670K50-1	0.3 m (12"), DC to 40 GHz, K(f) to K(m), 50 Ω
3670K50-2	0.6 m (24"), DC to 40 GHz, K(f) to K(m), 50 Ω
3670N50-1	0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-1	0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 Ω
3670N50-2	0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-2	0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 Ω

Transit Case

760-269	ShockLine™ VNA Transit Case, Hard plastic with wheels
---------	---

Tools

01-200	Calibrated Torque End Wrench, GPC-7 and Type N
01-201	Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in) (for tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors)
01-203	Torque End Wrench, 13/16 in, 0.9 N·m (8 lbf·in) (for tightening ruggedized SMA, 2.4 mm, K and V test port connectors)
01-204	End Wrench, 5/16 in, Universal, Circular, Open-ended (for SMA, 3.5 mm, 2.4 mm, K, and V connectors)
More Information	Refer to our Precision RF & Microwave Components Catalog for descriptions of adapters and other components.

Documentation

User Documentation	Soft copies of the manuals as Adobe Acrobat PDF files are included on the User Documentation USB memory device provided with the instrument. The Maintenance Manual is available from Anritsu Customer Service.
10100-00067	Product information, compliance, and safety
10410-00335	MS46322A/B Series VNA Operation Manual (OM)
10410-00336	MS46322A/B Series VNA Calibration and Measurement Guide (MG)
10410-00337	MS46121A/B, MS46122A/B, and MS46322A/B Series VNA User Interface Reference Manual (UIRM)
10410-00338	MS46121A/B, MS46122A/B, and MS46322A/B Series VNA Programming Manual (PM)